LIMITED
ADDITIONAL SOIL SAMPLING

FOX POINT FARMS PROJECT
1150 QUAIL GARDENS DRIVE
ENCINITAS, SAN DIEGO COUNTY, CALIFORNIA 92082

January 28, 2020

Project No.3611-SD

Prepared For:

Nolen Communities, LLC
1680 N. Coast Highway 101, Suite No. 51
Encinitas, California 92024

GEOTEK

TABLE OF CONTENTS

1.0 EXECUTIVE SUMMARY 1
2.0 INTRODUCTION 2
2.1 PURPOSE 2
2.2 SCOPE OF WORK 2
2.3 SIGNIFICANT ASSUMPTIONS 3
2.4 LIMITATIONS AND EXCEPTIONS 3
2.5 SPECIAL TERMS AND CONDITIONS 4
2.6 RELIANCE 4
3.0 BACKGROUND 4
4.0 SUMMARY OF ACTIVITIES 5
5.0 DISCUSSION OF RESULTS 5
6.0 CONCLUSIONS AND RECOMMENDATIONS 7
7.0 CERTIFICATIONS 7
8.0 8.0 REFERENCES 9

LIST OF APPENDICES

APPENDIX A: FIGURES
APPENDIX B: LABORATORY REPORTS
APPENDIX C: PROJECT TEAM QUALIFICATIONS

1.0 EXECUTIVE SUMMARY

GEOTEK, INC. (GEOTEK) has performed a Limited Additional Soil Sampling at the Fox Point Farms project (the "Site"), located at 1150 Quail Gardens Drive, Encinitas, San Diego County, California. Our services were conducted in substantial conformance with ASTM Standard E 1903-11, and currently recognized industry standards. Any additions or deletions from our scope of services are discussed in the appropriate sections of this assessment.

GEOTEK conducted limited soil sampling at the Site on November 27, 2019. Fifteen (15) locations ranging at depths between the surface and two (2) feet below surface were selected across the Site. Soil samples were obtained utilizing a hand auger and submitted to a state certified laboratory for analysis.

The samples were analyzed for total petroleum hydrocarbons (TPH), organo-chlorinated pesticides (OCPs), volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), metals, and selectively for polychlorinated biphenyls (PCBs).

This Limited Additional Soil Sampling has revealed evidence of subsurface contamination with heavy oils resulting from the leaking trash compactor at the Site. Based on results from GB-1 (surface sample), TPH in the diesel range (diesel range organics [DROs]) and mid-range organics (MROs) were found to be 24,000milligrams per kilogram (mg/Kg) and 44,000 mg/Kg, respectively. However, the sample taken at a depth of two (2) feet (GB-2) and five (5) feet to the north (directly downgradient) at the surface and two (2) feet below (GB-1+5-0 and GB-1+5-2) showed DROs and MROs below 100 mg/Kg. Samples GB-2 and GB-3 also show TPH above the reporting limit. Therefore, the impacted soil related to heavy oils observed is estimated to be six (6) to eight (8) cubic yards of soil. The impacted soil should be excavated and properly disposed of offsite. Confirmation samples should be performed along the excavation sides and bottom to confirm that the impacted soil has been mitigated.

During our investigation, two nursey buildings randomly selected for sampling were not sampled due to an active application of the pesticide spray being applied. The buildings not sampled are identified on Figure 2. Although sampling was not performed within these two buildings, sample results from other buildings indicate the conditions are consistent throughout the nursey buildings. In addition, a portion of the site is to be dedicated as agricultural use and a portion of the site, although may appear to be a greenhouse, is utilized as a flower grouping and distribution facility (see Figure 2).

This executive summary does not contain all the information that is found in the full report. The report should be read in its entirety to obtain a more complete understanding of the

information provided and to aid in any decisions made or actions taken based on this information.

2.0 INTRODUCTION

GEOTEK, INC. (GEOTEK) has performed a Limited Additional Soil Sampling at the Fox Point Farms Project (the "Site"), located at 1150 Quail Gardens Drive, Encinitas, San Diego County, California (refer to Figure 1 in Appendix A).

2.1 PURPOSE

The purpose of this Limited Additional Soil Sampling was to identify and evaluate suspected and actual environmental conditions involving the subject Site. It was not the purpose of this assessment to determine the degree or extent of contamination, if any, but rather the existence of contamination.

2.2 SCOPE OF WORK

GEOTEK conducted the investigation in substantial accordance with ASTM Standard E 1903-11 and currently recognized industry standards. Generally, the GEOTEK Scope of Services consisted of the following:

1. Coordination of the laboratories to complete the proposed Scope of Services.

2. Advancement of 15 borings at the Site from near surface soil utilizing a hand auger device to collect samples. One (1) soil sample at the surface and one sample at a depth of 1 or 2 feet from each boring was submitted to the laboratory for analysis.

3. Analysis of soil samples by a state certified laboratory for the following chemical analysis:

   Total Petroleum Hydrocarbons (TPH), organo-chlorinated pesticides (OCPs), volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), metals, and selectively for polychlorinated biphenyls (PCBs).

4. Preparation of this report presenting our findings, including applicable data, drawings, and photographs.

2.3 SIGNIFICANT ASSUMPTIONS

Specific assumptions by GEOTEK for this assessment include:

- GEOTEK had permission to access the Site grounds;
- The client has provided GEOTEK with available geotechnical or environmental reports for the Site;
- The client has provided GEOTEK with known current or historic uses of hazardous materials at the Site, or with other specialized knowledge of the environmental history of the Site and surrounding area.

2.4 LIMITATIONS AND EXCEPTIONS

GEOTEK conducted a Limited Additional Soil Sampling in substantial accordance with ASTM E 1903-11, and as authorized by Nolen Communities, LLC. This report is intended for the use of Nolen Communities, LLC and its immediate assignees. The contents should not be relied upon by any party other than the aforementioned without the express written consent of GEOTEK.

The findings, conclusions, and recommendations made in this report are based on the information that was made available to GEOTEK, in most instances from public records. The opinions and conclusions expressed herein are based on information obtained during our assessment and on our experience and current standards of technical practice. GEOTEK makes no other warranties, either express or implied, concerning the completeness of the data furnished to us. GEOTEK cannot be responsible for conditions or consequences arising from relevant facts that were concealed, withheld, or not fully disclosed at the time our assessment was undertaken. GEOTEK is not responsible, nor liable for work, testing or recommendations performed or provided by others. This document is not and should not be construed as a warranty or guarantee about the presence or absence of environmental hazards or contaminants, which may affect the subject site. Facts, conditions, and acceptable risk factors change with time; accordingly, this report should be viewed within this context.

Specific limitations to the scope of ASTM E 1903-11 due to contract limitations, availability of resources, and/or encountered Site conditions are discussed in the appropriate section(s) of this report.

2.5 SPECIAL TERMS AND CONDITIONS

This assessment report is presented as fulfilling the standard requirements of most financial institutions, governmental regulatory agencies, ASTM, and generally accepted industry standards and practices.

2.6 RELIANCE

This assessment has been prepared for the exclusive use, and may be relied upon by, Nolen Communities, LLC, their successors, and assignees. Third party reliance letters may be issued upon request and upon the payment of the, then current, fee for such letters. All third parties relying on this report, by such reliance, agree to be bound by the General Conditions and Limitations agreed to by Nolen Communities, LLC. No reliance by any party is permitted without such agreement, regardless of the content of the reliance letter itself.

3.0 BACKGROUND

During June 2018, GEOTEK conducted a Phase I investigation of the Site (GEOTEK, 2018). Findings from that work and subsequent interviews indicate the Site has been an active botanical nursery since approximately 1970.

The Phase I Environmental Site Assessment revealed evidence of a recognized environmental condition and an environmental concern in connection with the subject Site.

A trash compactor on a concrete pad located in the northern portion of the Site was leaking hydraulic fluid during the site visit, as evident by staining on the equipment and surrounding soil. Sampling and testing of this area for impacted soil surrounding the pad was recommended.

The Site is an active botanical nursery. Environmental impacts related to herbicides, pesticides, and fertilizer are considered to be a likely contaminant impacting the Site. Housekeeping practices were found to be less than optimal, further indicating potential for miss-handling of these materials. A combination of random and focused field sampling and laboratory testing program was recommended to identify or dismiss concerns related to past and current agricultural and botanical production at the Site.

4.0 SUMMARY OF ACTIVITIES

GeoTek conducted limited soil sampling at the Site on November 27, 2019.

Our field sampling plan included utilizing a hand auger to obtain surface samples and at depths ranging between one and two feet below surface. Sampling locations were selected and performed within the active botanical nurseries and outside at random locations (refer to Figure 2 for sample locations).

A total of 15 borings were performed and a total of 30 soil samples were obtained from the site. Seven (7) borings and 14 soil samples were collected around the perimeter of the site and include two borings at the trash compactor. Eight (8) borings and 16 soil samples were collected within the active botanical nursery. Samples were collected utilizing a hand auger, collected in 8-ounce glass jars, and placed into a precooled cooler. The samples were pack on ice and submitted under Chain-of-Custody to a state certified laboratory for analysis.

5.0 DISCUSSION OF RESULTS

The samples were analyzed for total petroleum hydrocarbons (TPH), organo-chlorinated pesticides (OCPs), volatile organic compounds (VOCs), semi-volatile organic compounds (SVOCs), metals, and selectively for polychlorinated biphenyls (PCBs). The laboratory report is included in Appendix B.

Analytical results revealed petroleum-based constituents were detected above their respective reporting limits in shallow soil at boring GB-1, GB-2, and GB-3. They were also detected at other sample locations below the reporting limits. The following table summarizes the total petroleum hydrocarbon results.

TOTAL PETROLEUM HYDROCARBON SUMMARY ANALYTICAL RESULTS

Sample ID	Depth (feet)	DROs (mg/Kg)	DROs (mg/Kg)	MROs (mg/Kg)
GB-1-0	0	ND (0.25)	**24,000**	**44,000**
GB-1-2	2	ND (0.25)	20	**110**
GB-1+5-0	0	ND (0.25)	12	62
GB-1+5-2	2	ND (0.25)	ND (10)	ND (50)

Sample ID	Depth (feet)	DROs (mg/Kg)	DROs (mg/Kg)	MROs (mg/Kg)
GB-2-0	0	ND (0.25)	54	**340**
GB-2-2	2	ND (0.25)	23	**140**
GB-3-0	0	ND (0.25)	49	**240**
GB-3-2	2	ND (0.25)	ND (10)	ND (50)
GB-4-0	0	ND (0.25)	15	76
GB-4-1	1	ND (0.25)	ND (10)	ND (50)
GB-5-0	0	ND (0.25)	33	77
GB-5-2	2	ND (0.25)	ND (10)	ND (50)
GB-6-0	0	ND (0.25)	15	84
GB-6-2	2	ND (0.25)	ND (10)	ND (50)
GB-7-0	0	0.32	ND (10)	ND (50)
GB-7-2	2	ND (0.25)	ND (10)	ND (50)
GB-8-0	0	ND (0.25)	ND (10)	ND (50)
GB-8-1	1	0.32	ND (10)	ND (50)
GB-9-0	0	ND (0.25)	ND (10)	ND (50)
GB-9-2	2	ND (0.25)	ND (10)	ND (50)
GB-10-0	0	ND (0.25)	ND (10)	51
GB-10-2	2	ND (0.25)	ND (10)	ND (50)
GB-11-0	0	ND (0.25)	ND (10)	ND (50)
GB-11-2	2	ND (0.25)	ND (10)	ND (50)
GB-12-0	0	ND (0.25)	12	51
GB-12-2	2	ND (0.25)	ND (10)	60
GB-13-0	0	ND (0.25)	ND (10)	ND (50)
GB-13-1	1	ND (0.25)	ND (10)	ND (50)
GB-14-0	0	ND (0.25)	36	80
GB-14-2	2	ND (0.25)	ND (10)	ND (50)

Sample ID	Depth (feet)	DROs (mg/Kg)	DROs (mg/Kg)	MROs (mg/Kg)
RSL		100	100	100

mg/kg = milligram per kilogram

RSL= EPA Regional Screening Level (RSL), TQH=0.1, for residential soil, November 2019

Analytical results for OCPs, while detecting minor concentrations of DDE, DDE, Endosulfan I, Endosulfan II, and Toxaphine, did not detect these chemicals in concentrations above the RSLs.

Analytical results did not detect volatile organic compounds or PCBs.

Analytical results did not detect metals detected above RSLs. The metals detected below RSLs are considered to be background levels.

6.0 CONCLUSIONS AND RECOMMENDATIONS

GEOTEK has performed a Limited Additional Soil Sampling for the subject Site in substantial conformance with the scope and limitations of ASTM E 1903-11.

This Limited Additional Soil Sampling has revealed evidence of petroleum hydrocarbon surface contamination resulting from the leaking trash compactor at the Site (heavy oils). The area of impacted soil related to the trash compactor is estimated to be six (6) to eight (8) cubic yards which should be excavated and removed. Two other areas, on the west portion of the Site, also require remediation, estimated to be approximately 2-3 cubic yards each. Remediation of these areas does not pose a significant and logistical clean-up effort. The impacted soil should be excavated and properly disposed of offsite. Confirmation samples should be performed along the excavation sides and bottom to confirm that the impacted soil has been mitigated.

7.0 CERTIFICATIONS

I declare that, to the best of my professional knowledge and belief, I meet the definition of Environmental Professional as defined in 40 CFR 312. I have the specific qualifications based on education, training, and experience to assess a property of the nature, history, and setting

of the subject Site. I have developed and performed the all appropriate inquiries in conformance with the standards and practices set forth in 40 CFR 312.

The qualifications of the Project Team are included in Appendix C.

We appreciate this opportunity to be of service. If you have any questions, or if we can be of further service, please contact us at (760) 599-0509.

Sincerely,
GEOTEK, INC.



Christopher D. Livesey
CEG 2733, Exp. 5/31/21
Project Geologist

J. Michael Batten, REPA
Environmental Services Manager
Registered Environmental Property Assessor
No. 113162 (expires 06/15/20)

8.0 8.0 REFERENCES

GeoTek, Inc. "Phase I Environmental Site Assessment, Fox Point Farms Project, 1150 Quail Gardens Drive, Encinitas, San Diego County, California 92082" Project No. 3611-SD dated November 18, 2019.

U.S. GOVERNMENT

- Environmental Protection Agency
  Regional Screening Levels (https://www.epa.gov/risk/regional-screening-levels-rsls-generic-tables)

APPENDIX A

FIGURES

EDR

Historical Topo Map

2012

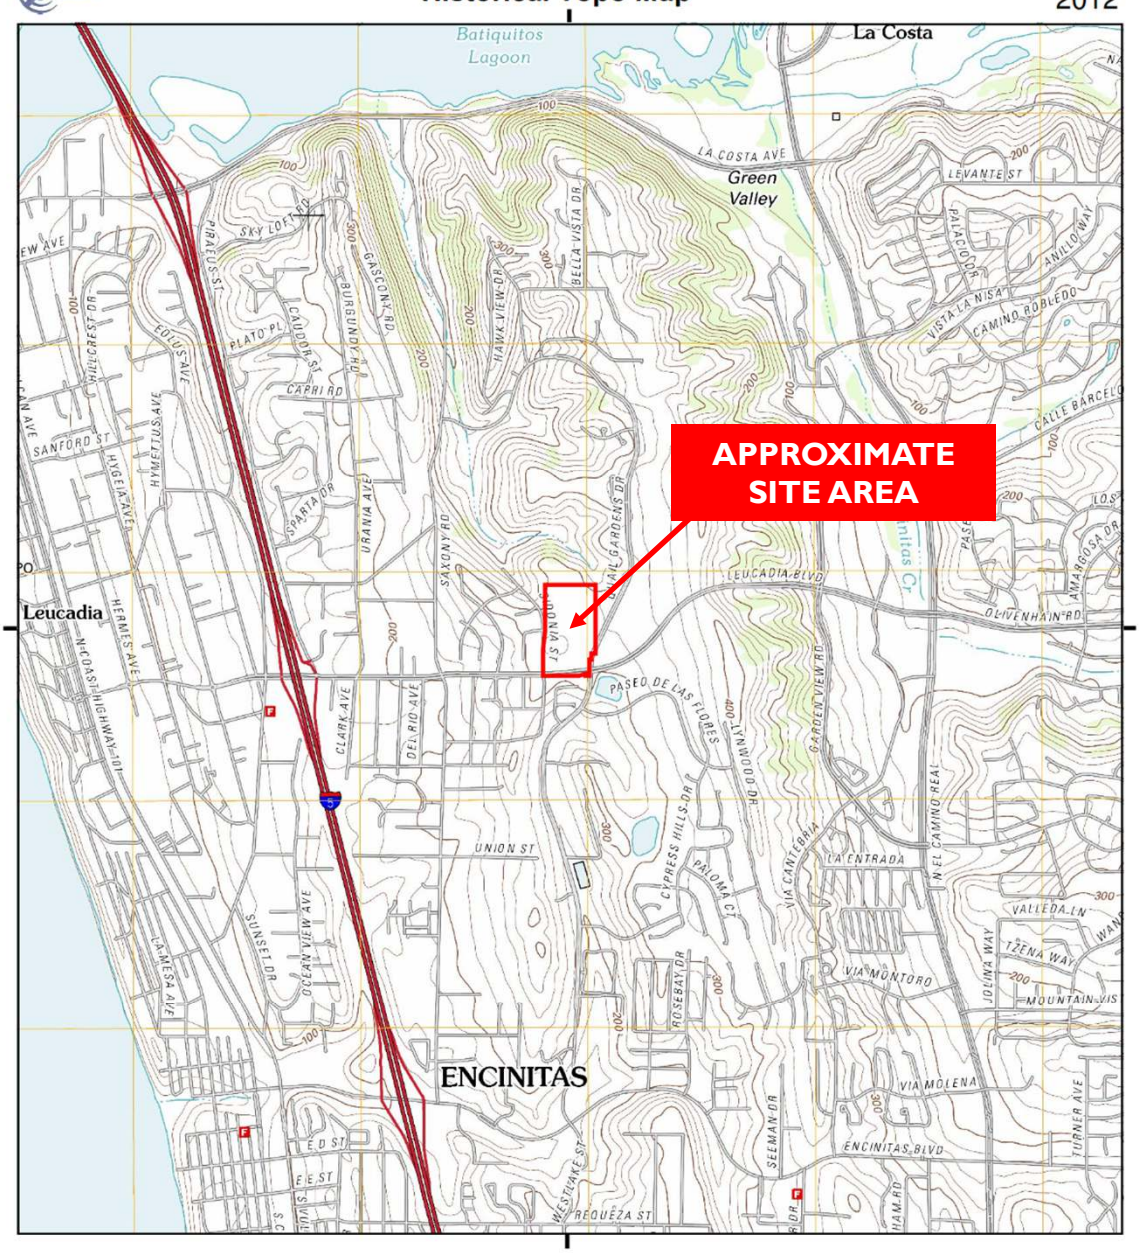

This report includes information from the following map sheet(s).

0 Miles 0.25 0.5 1 1.5

NW N NE
W E
SW S SE

TP, Encinitas, 2012, 7.5-minute

SITE NAME: Fox Point Farms
ADDRESS: 1150 Quail Gardens Drive
Encinitas, CA 92024
CLIENT: Geotek

Nolen Communities, LLC.
Fox Point Farms Project
1150 Quail Gardens Drive,
Encinitas, California

Project No. 3611-SD

NORTH

Figure 1
Site Location and General Site Topography Map

GEOTEK

N

Not to Scale

Imagery from Google Earth, 2020

LEGEND

GB-14 Approximate Location of Hand Auger Boring, +5 indicates Five Foot offset from Original Boring

Nolen Communities, LLC. Fox Point Farms 1150 Quail Gardens Drive Encinitas, California	Figure 2 Boring Location Map	GEOTEK 1384 Poinsettia Avenue, Suite A Vista, California 92081
PN: 3611-SD DATE: January 2020		

APPENDIX B

LABORATORY REPORTS

Orange Coast Analytical, Inc.
3002 Dow, Suite 532, Tustin, CA 92780 (714) 832-0064 Fax (714) 832-0067
4620 E. Elwood, Suite 4, Phoenix, AZ 85040 (480) 736-0960 Fax (480) 736-0970

LABORATORY REPORT FORM

ORANGE COAST ANALYTICAL, INC.

3002 Dow Suite 532 Tustin, CA 92780

(714) 832-0064

Laboratory Certification (ELAP) No.: 2576
Expiration Date: 2020
Los Angeles County Sanitation District Lab ID# 10206

Laboratory Director's Name:

Mark Noorani

Client:	GeoTek, Inc.
Laboratory Reference:	GTK 24756
Project Name:	Fox Point Farms
Project Number:	3611-SD
Date Received:	11/27/2019
Date Reported:	12/7/2019
Chain of Custody Received:	☑
Analytical Method:	8015B, 8081A, 8082, 8260B, 8015M, 6010B, 7471A,

Mark Noorani, Laboratory Director

© This report may only be reproduced in full. Any partial reproduction of this report requires written permission from Orange Coast Analytical, Inc.

Rev1.0

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Case Narrative

Sample Receipt:

All samples on the Chain of Custody were received by OCA at 4.2ºC, on ice.

Holding Times:

All samples were analyzed within required holding times unless otherwise noted in the data qualifier section of the report.

Analytical Methods:

Sample analysis was performed following the analytical methods listed on the cover page.

Data Qualifiers:

Within this report, data qualifiers may have been assigned to clarify deviations in common laboratory procedures or any divergence from laboratory QA/QC criteria. If a data qualifier has been used, it will appear in the back of the report along with its description. All method QA/QC criteria have been met unless otherwise noted in the data qualifier section.

Definition of Terms:

The definitions of common terms and acronyms used in the report have been placed at the back of the report to assist data users.

Comments:

None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Client Sample Summary

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-1-0	24756-001	11/27/2019	11/27/2019	Soil
GB-1-2	24756-002	11/27/2019	11/27/2019	Soil
GB-1+5-0	24756-003	11/27/2019	11/27/2019	Soil
GB-1+5-2	24756-004	11/27/2019	11/27/2019	Soil
GB-2-0	24756-005	11/27/2019	11/27/2019	Soil
GB-2-2	24756-006	11/27/2019	11/27/2019	Soil
GB-3-0	24756-007	11/27/2019	11/27/2019	Soil
GB-3-2	24756-008	11/27/2019	11/27/2019	Soil
GB-4-0	24756-009	11/27/2019	11/27/2019	Soil
GB-4-1	24756-010	11/27/2019	11/27/2019	Soil
GB-5-0	24756-011	11/27/2019	11/27/2019	Soil
GB-5-2	24756-012	11/27/2019	11/27/2019	Soil
GB-6-0	24756-013	11/27/2019	11/27/2019	Soil
GB-6-2	24756-014	11/27/2019	11/27/2019	Soil
GB-7-0	24756-015	11/27/2019	11/27/2019	Soil
GB-7-2	24756-016	11/27/2019	11/27/2019	Soil
GB-8-0	24756-017	11/27/2019	11/27/2019	Soil
GB-8-1	24756-018	11/27/2019	11/27/2019	Soil
GB-9-0	24756-019	11/27/2019	11/27/2019	Soil
GB-9-2	24756-020	11/27/2019	11/27/2019	Soil
GB-10-0	24756-021	11/27/2019	11/27/2019	Soil
GB-10-2	24756-022	11/27/2019	11/27/2019	Soil
GB-11-0	24756-023	11/27/2019	11/27/2019	Soil
GB-11-2	24756-024	11/27/2019	11/27/2019	Soil
GB-12-0	24756-025	11/27/2019	11/27/2019	Soil
GB-12-2	24756-026	11/27/2019	11/27/2019	Soil
GB-13-0	24756-027	11/27/2019	11/27/2019	Soil
GB-13-1	24756-028	11/27/2019	11/27/2019	Soil
GB-14-0	24756-029	11/27/2019	11/27/2019	Soil
GB-14-2	24756-030	11/27/2019	11/27/2019	Soil

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Diesel Range Organics - DROs (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-0	24756-001	11/27/2019 16:50	11/27/2019 8:35	12/3/2019 10:53	12/3/2019 18:27	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	24000	Octacosane	Diluted

Dilution Factor: 50
Data Qualifiers: D2, S8,

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-0	24756-001	11/27/2019 16:50	11/27/2019 8:35	12/3/2019 10:53	12/3/2019 18:27	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	44000	Octacosane	Diluted

Dilution Factor: 50
Data Qualifiers: D2, S8,

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-2	24756-002	11/27/2019 16:50	11/27/2019 8:40	12/3/2019 10:53	12/3/2019 15:37	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	20	Octacosane	87

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-2	24756-002	11/27/2019 16:50	11/27/2019 8:40	12/3/2019 10:53	12/3/2019 15:37	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	110	Octacosane	87

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-0	24756-003	11/27/2019 16:50	11/27/2019 8:45	12/3/2019 10:53	12/3/2019 16:11	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	12	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Extractable Fuel Hydrocarbons (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-0	24756-003	11/27/2019 16:50	11/27/2019 8:45	12/3/2019 10:53	12/3/2019 16:11	Soil

ANALYTE	mg/kg
MROs	62

Surrogate:	% RC*
Octacosane	82

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-2	24756-004	11/27/2019 16:50	11/27/2019 8:50	12/3/2019 10:53	12/3/2019 16:44	Soil

ANALYTE	mg/kg
DROs	<10

Surrogate:	% RC*
Octacosane	79

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-2	24756-004	11/27/2019 16:50	11/27/2019 8:50	12/3/2019 10:53	12/3/2019 16:44	Soil

ANALYTE	mg/kg
MROs	<50

Surrogate:	% RC*
Octacosane	79

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-2-0	24756-005	11/27/2019 16:50	11/27/2019 8:55	12/3/2019 10:53	12/3/2019 17:18	Soil

ANALYTE	mg/kg
DROs	54

Surrogate:	% RC*
Octacosane	92

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-2-0	24756-005	11/27/2019 16:50	11/27/2019 8:55	12/3/2019 10:53	12/3/2019 17:18	Soil

ANALYTE	mg/kg
MROs	340

Surrogate:	% RC*
Octacosane	92

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Diesel Range Organics - DROs (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-2-2	24756-006	11/27/2019 16:50	11/27/2019 9:00	12/3/2019 10:53	12/3/2019 17:53	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	23	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-2-2	24756-006	11/27/2019 16:50	11/27/2019 9:00	12/3/2019 10:53	12/3/2019 17:53	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	140	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-3-0	24756-007	11/27/2019 16:50	11/27/2019 9:05	12/3/2019 10:53	12/3/2019 20:28	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	49	Octacosane	88

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-3-0	24756-007	11/27/2019 16:50	11/27/2019 9:05	12/3/2019 10:53	12/3/2019 20:28	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	240	Octacosane	88

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-3-2	24756-008	11/27/2019 16:50	11/27/2019 9:10	12/3/2019 10:53	12/3/2019 21:03	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	80

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Extractable Fuel Hydrocarbons (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-3-2	24756-008	11/27/2019 16:50	11/27/2019 9:10	12/3/2019 10:53	12/3/2019 21:03	Soil

ANALYTE	mg/kg
MROs	<50

Surrogate:	% RC*
Octacosane	80

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-4-0	24756-009	11/27/2019 16:50	11/27/2019 9:15	12/3/2019 10:53	12/3/2019 21:36	Soil

ANALYTE	mg/kg
DROs	15

Surrogate:	% RC*
Octacosane	80

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-4-0	24756-009	11/27/2019 16:50	11/27/2019 9:15	12/3/2019 10:53	12/3/2019 21:36	Soil

ANALYTE	mg/kg
MROs	76

Surrogate:	% RC*
Octacosane	80

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-4-1	24756-010	11/27/2019 16:50	11/27/2019 9:20	12/3/2019 10:53	12/3/2019 22:11	Soil

ANALYTE	mg/kg
DROs	<10

Surrogate:	% RC*
Octacosane	89

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-4-1	24756-010	11/27/2019 16:50	11/27/2019 9:20	12/3/2019 10:53	12/3/2019 22:11	Soil

ANALYTE	mg/kg
MROs	<50

Surrogate:	% RC*
Octacosane	89

* Acc Recovery: 45-170 %

Dilution Factor: 1
Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Diesel Range Organics - DROs (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-5-0	24756-011	11/27/2019 16:50	11/27/2019 9:25	12/3/2019 10:53	12/3/2019 22:44	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	33	Octacosane	83

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

GB-5-0	24756-011	11/27/2019 16:50	11/27/2019 9:25	12/3/2019 10:53	12/3/2019 22:44	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	77	Octacosane	83

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

GB-5-2	24756-012	11/27/2019 16:50	11/27/2019 9:30	12/3/2019 10:53	12/3/2019 23:19	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	76

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

GB-5-2	24756-012	11/27/2019 16:50	11/27/2019 9:30	12/3/2019 10:53	12/3/2019 23:19	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	76

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

GB-6-0	24756-013	11/27/2019 16:50	11/27/2019 9:35	12/3/2019 10:53	12/3/2019 23:52	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	15	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Extractable Fuel Hydrocarbons (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-6-0	24756-013	11/27/2019 16:50	11/27/2019 9:35	12/3/2019 10:53	12/3/2019 23:52	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	84	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-6-2	24756-014	11/27/2019 16:50	11/27/2019 9:40	12/3/2019 10:53	12/4/2019 0:27	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-6-2	24756-014	11/27/2019 16:50	11/27/2019 9:40	12/3/2019 10:53	12/4/2019 0:27	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-7-0	24756-015	11/27/2019 16:50	11/27/2019 9:45	12/3/2019 10:53	12/4/2019 1:00	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-7-0	24756-015	11/27/2019 16:50	11/27/2019 9:45	12/3/2019 10:53	12/4/2019 1:00	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	82

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Diesel Range Organics - DROs (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-7-2	24756-016	11/27/2019 16:50	11/27/2019 9:50	12/3/2019 10:53	12/4/2019 1:35	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	106
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-7-2	24756-016	11/27/2019 16:50	11/27/2019 9:50	12/3/2019 10:53	12/4/2019 1:35	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	106
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-8-0	24756-017	11/27/2019 16:50	11/27/2019 9:55	12/3/2019 10:53	12/4/2019 2:08	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	87
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-8-0	24756-017	11/27/2019 16:50	11/27/2019 9:55	12/3/2019 10:53	12/4/2019 2:08	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	87
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-8-1	24756-018	11/27/2019 16:50	11/27/2019 10:00	12/3/2019 10:53	12/4/2019 2:43	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	107
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Extractable Fuel Hydrocarbons (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-8-1	24756-018	11/27/2019 16:50	11/27/2019 10:00	12/3/2019 10:53	12/4/2019 2:43	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	107

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

GB-9-0	24756-019	11/27/2019 16:50	11/27/2019 11:00	12/3/2019 14:22	12/4/2019 6:41	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	79

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

GB-9-0	24756-019	11/27/2019 16:50	11/27/2019 11:00	12/3/2019 14:22	12/4/2019 6:41	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	79

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

GB-9-2	24756-020	11/27/2019 16:50	11/27/2019 11:05	12/3/2019 14:22	12/4/2019 7:15	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	84

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

GB-9-2	24756-020	11/27/2019 16:50	11/27/2019 11:05	12/3/2019 14:22	12/4/2019 7:15	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	84

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Diesel Range Organics - DROs (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-10-0	24756-021	11/27/2019 16:50	11/27/2019 11:10	12/3/2019 14:22	12/4/2019 7:50	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	81
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

GB-10-0	24756-021	11/27/2019 16:50	11/27/2019 11:10	12/3/2019 14:22	12/4/2019 7:50	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	51	Octacosane	81
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

GB-10-2	24756-022	11/27/2019 16:50	11/27/2019 11:20	12/3/2019 14:22	12/4/2019 8:23	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	78
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

GB-10-2	24756-022	11/27/2019 16:50	11/27/2019 11:20	12/3/2019 14:22	12/4/2019 8:23	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	78
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

GB-11-0	24756-023	11/27/2019 16:50	11/27/2019 11:30	12/3/2019 14:22	12/4/2019 8:57	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	101
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Extractable Fuel Hydrocarbons (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-11-0	24756-023	11/27/2019 16:50	11/27/2019 11:30	12/3/2019 14:22	12/4/2019 8:57	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	101
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-11-2	24756-024	11/27/2019 16:50	11/27/2019 11:40	12/3/2019 14:22	12/4/2019 9:31	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	79
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-11-2	24756-024	11/27/2019 16:50	11/27/2019 11:40	12/3/2019 14:22	12/4/2019 9:31	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	79
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-12-0	24756-025	11/27/2019 16:50	11/27/2019 12:00	12/3/2019 14:22	12/4/2019 10:04	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	12	Octacosane	79
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-12-0	24756-025	11/27/2019 16:50	11/27/2019 12:00	12/3/2019 14:22	12/4/2019 10:04	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	51	Octacosane	79
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Diesel Range Organics - DROs (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-12-2	24756-026	11/27/2019 16:50	11/27/2019 12:10	12/3/2019 14:22	12/4/2019 10:38	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	75
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

GB-12-2	24756-026	11/27/2019 16:50	11/27/2019 12:10	12/3/2019 14:22	12/4/2019 10:38	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	60	Octacosane	75
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

GB-13-0	24756-027	11/27/2019 16:50	11/27/2019 12:30	12/3/2019 14:22	12/4/2019 11:11	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	104
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

GB-13-0	24756-027	11/27/2019 16:50	11/27/2019 12:30	12/3/2019 14:22	12/4/2019 11:11	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	104
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

GB-13-1	24756-028	11/27/2019 16:50	11/27/2019 12:40	12/3/2019 14:22	12/4/2019 11:45	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	108
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Extractable Fuel Hydrocarbons (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-13-1	24756-028	11/27/2019 16:50	11/27/2019 12:40	12/3/2019 14:22	12/4/2019 11:45	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	108
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-14-0	24756-029	11/27/2019 16:50	11/27/2019 12:50	12/3/2019 14:22	12/4/2019 12:42	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	36	Octacosane	95
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-14-0	24756-029	11/27/2019 16:50	11/27/2019 12:50	12/3/2019 14:22	12/4/2019 12:42	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	80	Octacosane	95
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-14-2	24756-030	11/27/2019 16:50	11/27/2019 13:00	12/3/2019 14:22	12/4/2019 13:15	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	99
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-14-2	24756-030	11/27/2019 16:50	11/27/2019 13:00	12/3/2019 14:22	12/4/2019 13:15	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	99
		* Acc Recovery:	45-170 %

Dilution Factor: 1
Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Diesel Range Organics - DROs (EPA 8015B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
Method Blank	MBBL1203191			12/3/2019 10:53	12/3/2019 12:02	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	79

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Method Blank	MBBL1203191			12/3/2019 10:53	12/3/2019 12:02	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	79

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Method Blank	MBBL1203192			12/3/2019 14:22	12/4/2019 4:46	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
DROs	<10	Octacosane	86

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Method Blank	MBBL1203192			12/3/2019 14:22	12/4/2019 4:46	Soil

ANALYTE	mg/kg	Surrogate:	% RC*
MROs	<50	Octacosane	86

Dilution Factor: 1
Data Qualifiers: None

* Acc Recovery: 45-170 %

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-0	24756-001	11/27/2019 16:50	11/27/2019 8:35	11/29/2019 10:00	12/4/2019 13:22	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	0.50

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: S5,

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-2	24756-002	11/27/2019 16:50	11/27/2019 8:40	11/29/2019 10:00	12/4/2019 13:36	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	78

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-0	24756-003	11/27/2019 16:50	11/27/2019 8:45	11/29/2019 10:00	12/4/2019 13:51	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	70

Surrogate:	% RC*
Decachlorobiphenyl	79

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-2	24756-004	11/27/2019 16:50	11/27/2019 8:50	11/29/2019 10:00	12/4/2019 14:06	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	93

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-2-0	24756-005	11/27/2019 16:50	11/27/2019 8:55	11/29/2019 10:00	12/4/2019 14:21	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	78

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-2-2	24756-006	11/27/2019 16:50	11/27/2019 9:00	11/29/2019 10:00	12/4/2019 14:35	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	82

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-3-0	24756-007	11/27/2019 16:50	11/27/2019 9:05	11/29/2019 10:00	12/4/2019 14:50	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	79

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-3-2	24756-008	11/27/2019 16:50	11/27/2019 9:10	11/29/2019 10:00	12/4/2019 15:05	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	87

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-4-0	24756-009	11/27/2019 16:50	11/27/2019 9:15	11/29/2019 10:00	12/6/2019 8:38	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	117

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-4-1	24756-010	11/27/2019 16:50	11/27/2019 9:20	11/29/2019 10:00	12/6/2019 8:53	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	108

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-5-0	24756-011	11/27/2019 16:50	11/27/2019 9:25	11/29/2019 10:00	12/6/2019 9:07	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	106

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-5-2	24756-012	11/27/2019 16:50	11/27/2019 9:30	11/29/2019 10:00	12/6/2019 9:27	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	108

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-6-0	24756-013	11/27/2019 16:50	11/27/2019 9:35	11/29/2019 10:00	12/6/2019 9:42	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	98

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-6-2	24756-014	11/27/2019 16:50	11/27/2019 9:40	11/29/2019 10:00	12/6/2019 9:57	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	114

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-7-0	24756-015	11/27/2019 16:50	11/27/2019 9:45	11/29/2019 10:00	12/5/2019 11:56	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	97

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-7-2	24756-016	11/27/2019 16:50	11/27/2019 9:50	11/29/2019 10:00	12/6/2019 10:11	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	102

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-8-0	24756-017	11/27/2019 16:50	11/27/2019 9:55	11/29/2019 10:00	12/5/2019 12:10	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	110

Surrogate:	% RC*
Decachlorobiphenyl	91

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-8-1	24756-018	11/27/2019 16:50	11/27/2019 10:00	11/29/2019 10:00	12/6/2019 10:26	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	108

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-9-0	24756-019	11/27/2019 16:50	11/27/2019 11:00	12/3/2019 7:30	12/6/2019 10:41	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	17
4,4'-DDT	50-29-3	21
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	38
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	109

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-9-2	24756-020	11/27/2019 16:50	11/27/2019 11:05	12/3/2019 7:30	12/6/2019 10:55	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	110

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-10-0	24756-021	11/27/2019 16:50	11/27/2019 11:10	12/3/2019 7:30	12/6/2019 11:10	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	14
4,4'-DDT	50-29-3	24
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	18
Endosulfan II	33213-65-9	8.6
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	113

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-10-2	24756-022	11/27/2019 16:50	11/27/2019 11:20	12/3/2019 7:30	12/6/2019 11:25	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	105

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-11-0	24756-023	11/27/2019 16:50	11/27/2019 11:30	12/3/2019 7:30	12/6/2019 11:40	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	111

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-11-2	24756-024	11/27/2019 16:50	11/27/2019 11:40	12/3/2019 7:30	12/6/2019 11:54	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	102

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-12-2	24756-026	11/27/2019 16:50	11/27/2019 12:10	12/3/2019 7:30	12/6/2019 12:24	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	430
4,4'-DDE	72-55-9	430
4,4'-DDT	50-29-3	32
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	115

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: N1,

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-13-0	24756-027	11/27/2019 16:50	11/27/2019 12:30	12/3/2019 7:30	12/6/2019 13:37	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	28
4,4'-DDT	50-29-3	12
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	52

Surrogate:	% RC*
Decachlorobiphenyl	112

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-13-1	24756-028	11/27/2019 16:50	11/27/2019 12:40	12/3/2019 7:30	12/6/2019 13:52	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	19
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	106

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-14-0	24756-029	11/27/2019 16:50	11/27/2019 12:50	12/3/2019 7:30	12/6/2019 14:06	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	5.3
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	109

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-14-2	24756-030	11/27/2019 16:50	11/27/2019 13:00	12/3/2019 7:30	12/6/2019 14:21	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	107

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
Method Blank	MBAV1129191			11/29/2019 10:00	12/4/2019 10:10	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	118

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organochlorine Pesticides (EPA 8081A)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
Method Blank	MBAV1203191			12/3/2019 7:30	12/5/2019 10:13	Soil

ANALYTE	CAS #	µg/kg
Aldrin	309-00-2	<2.0
alpha-BHC	319-84-6	<5.0
beta-BHC	319-85-7	<5.0
gamma-BHC (Lindane)	58-89-9	<5.0
delta-BHC	319-86-8	<10
Chlordane	57-74-9	<30
4,4'-DDD	72-54-8	<10
4,4'-DDE	72-55-9	<5.0
4,4'-DDT	50-29-3	<10
Dieldrin	60-57-1	<2.0
Endosulfan I	959-98-8	<10
Endosulfan II	33213-65-9	<5.0
Endosulfan sulfate	1031-07-8	<10
Endrin	72-20-8	<10
Endrin aldehyde	7421-93-4	<10
Endrin ketone	53494-70-5	<5.0
Heptachlor	76-44-8	<2.0
Heptachlor epoxide	1024-57-3	<5.0
Methoxychlor	72-43-5	<10
Toxaphene	8001-35-2	<40

Surrogate:	% RC*
Decachlorobiphenyl	106

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Polychlorinated Biphenyl's (EPA 8082)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-0	24756-001	11/27/2019 16:50	11/27/2019 8:35	11/29/2019 10:00	12/4/2019 13:22	Soil

ANALYTE	CAS #	µg/kg
PCB-1016	12674-11-2	<25
PCB-1221	11104-28-2	<25
PCB-1232	11141-16-5	<25
PCB-1242	53469-21-9	<25
PCB-1248	12672-29-6	<25
PCB-1254	11097-69-1	<25
PCB-1260	11096-82-5	<25

Surrogate:	% RC*
Decachlorobiphenyl	4.1

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: S5,

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-2	24756-002	11/27/2019 16:50	11/27/2019 8:40	11/29/2019 10:00	12/4/2019 13:36	Soil

ANALYTE	CAS #	µg/kg
PCB-1016	12674-11-2	<25
PCB-1221	11104-28-2	<25
PCB-1232	11141-16-5	<25
PCB-1242	53469-21-9	<25
PCB-1248	12672-29-6	<25
PCB-1254	11097-69-1	<25
PCB-1260	11096-82-5	<25

Surrogate:	% RC*
Decachlorobiphenyl	79

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-0	24756-003	11/27/2019 16:50	11/27/2019 8:45	11/29/2019 10:00	12/4/2019 13:51	Soil

ANALYTE	CAS #	µg/kg
PCB-1016	12674-11-2	<25
PCB-1221	11104-28-2	<25
PCB-1232	11141-16-5	<25
PCB-1242	53469-21-9	<25
PCB-1248	12672-29-6	<25
PCB-1254	11097-69-1	<25
PCB-1260	11096-82-5	<25

Surrogate:	% RC*
Decachlorobiphenyl	81

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Polychlorinated Biphenyl's (EPA 8082)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-2	24756-004	11/27/2019 16:50	11/27/2019 8:50	11/29/2019 10:00	12/4/2019 14:06	Soil

ANALYTE	CAS #	µg/kg
PCB-1016	12674-11-2	<25
PCB-1221	11104-28-2	<25
PCB-1232	11141-16-5	<25
PCB-1242	53469-21-9	<25
PCB-1248	12672-29-6	<25
PCB-1254	11097-69-1	<25
PCB-1260	11096-82-5	<25

Surrogate:	% RC*
Decachlorobiphenyl	90

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Method Blank	MBAV1129191	11/29/2019 10:00	12/4/2019 10:10	Soil

ANALYTE	CAS #	µg/kg
PCB-1016	12674-11-2	<25
PCB-1221	11104-28-2	<25
PCB-1232	11141-16-5	<25
PCB-1242	53469-21-9	<25
PCB-1248	12672-29-6	<25
PCB-1254	11097-69-1	<25
PCB-1260	11096-82-5	<25

Surrogate:	% RC*
Decachlorobiphenyl	108

* Acceptable Recovery: 49-131 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-0	24756-001	11/27/2019 16:50	11/27/2019 8:35	12/2/2019 6:00	12/2/2019 11:02	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	60	50-133 %
Toluene-d8:	65	61-130 %
4-Bromofluorobenzene:	70	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1-2	24756-002	11/27/2019 16:50	11/27/2019 8:40	12/2/2019 6:00	12/2/2019 11:28	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	61	50-133 %
Toluene-d8:	66	61-130 %
4-Bromofluorobenzene:	70	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-0	24756-003	11/27/2019 16:50	11/27/2019 8:45	12/2/2019 6:00	12/2/2019 11:49	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	61	50-133 %
Toluene-d8:	66	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-1+5-2	24756-004	11/27/2019 16:50	11/27/2019 8:50	12/2/2019 6:00	12/3/2019 9:24	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	59	50-133 %
Toluene-d8:	69	61-130 %
4-Bromofluorobenzene:	76	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-2-0	24756-005	11/27/2019 16:50	11/27/2019 8:55	12/2/2019 6:00	12/3/2019 9:45	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	59	50-133 %
Toluene-d8:	69	61-130 %
4-Bromofluorobenzene:	74	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-2-2	24756-006	11/27/2019 16:50	11/27/2019 9:00	12/2/2019 6:00	12/3/2019 10:06	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	57	50-133 %
Toluene-d8:	68	61-130 %
4-Bromofluorobenzene:	75	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-3-0	24756-007	11/27/2019 16:50	11/27/2019 9:05	12/2/2019 6:00	12/3/2019 10:30	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	74	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-3-2	24756-008	11/27/2019 16:50	11/27/2019 9:10	12/2/2019 6:00	12/3/2019 10:52	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-4-0	24756-009	11/27/2019 16:50	11/27/2019 9:15	12/2/2019 6:00	12/3/2019 11:13	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-4-1	24756-010	11/27/2019 16:50	11/27/2019 9:20	12/2/2019 6:00	12/3/2019 11:35	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-5-0	24756-011	11/27/2019 16:50	11/27/2019 9:25	12/2/2019 6:00	12/3/2019 11:57	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	64	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-5-2	24756-012	11/27/2019 16:50	11/27/2019 9:30	12/2/2019 6:00	12/3/2019 12:19	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	62	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-6-0	24756-013	11/27/2019 16:50	11/27/2019 9:35	12/2/2019 6:00	12/3/2019 12:41	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	62	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	74	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-6-2	24756-014	11/27/2019 16:50	11/27/2019 9:40	12/2/2019 6:00	12/3/2019 13:02	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	74	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-7-0	24756-015	11/27/2019 16:50	11/27/2019 9:45	12/2/2019 6:00	12/3/2019 13:45	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	62	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-7-2	24756-016	11/27/2019 16:50	11/27/2019 9:50	12/2/2019 6:00	12/3/2019 14:07	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-8-0	24756-017	11/27/2019 16:50	11/27/2019 9:55	12/2/2019 6:00	12/3/2019 14:29	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-8-1	24756-018	11/27/2019 16:50	11/27/2019 10:00	12/2/2019 6:00	12/3/2019 14:50	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-9-0	24756-019	11/27/2019 16:50	11/27/2019 11:00	12/2/2019 10:45	12/3/2019 15:10	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	61	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	74	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-9-2	24756-020	11/27/2019 16:50	11/27/2019 11:05	12/2/2019 10:45	12/3/2019 15:32	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	62	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-10-0	24756-021	11/27/2019 16:50	11/27/2019 11:10	12/2/2019 10:45	12/3/2019 15:54	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	62	50-133 %
Toluene-d8:	73	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-10-2	24756-022	11/27/2019 16:50	11/27/2019 11:20	12/2/2019 10:45	12/3/2019 16:36	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	71	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-11-0	24756-023	11/27/2019 16:50	11/27/2019 11:30	12/2/2019 10:45	12/3/2019 16:57	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	71	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-11-2	24756-024	11/27/2019 16:50	11/27/2019 11:40	12/2/2019 10:45	12/4/2019 10:50	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	64	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-12-0	24756-025	11/27/2019 16:50	11/27/2019 12:00	12/2/2019 10:45	12/4/2019 11:12	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-12-2	24756-026	11/27/2019 16:50	11/27/2019 12:10	12/2/2019 10:45	12/4/2019 11:34	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	65	50-133 %
Toluene-d8:	71	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-13-0	24756-027	11/27/2019 16:50	11/27/2019 12:30	12/2/2019 10:45	12/4/2019 11:55	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	64	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-13-1	24756-028	11/27/2019 16:50	11/27/2019 12:40	12/2/2019 10:45	12/4/2019 12:17	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	65	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	73	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-14-0	24756-029	11/27/2019 16:50	11/27/2019 12:50	12/2/2019 10:45	12/4/2019 12:39	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	63	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
GB-14-2	24756-030	11/27/2019 16:50	11/27/2019 13:00	12/2/2019 10:45	12/4/2019 13:01	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	65	50-133 %
Toluene-d8:	72	61-130 %
4-Bromofluorobenzene:	72	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
Method Blank	MBHT1202193			12/2/2019 10:45	12/3/2019 7:21	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	57	50-133 %
Toluene-d8:	69	61-130 %
4-Bromofluorobenzene:	76	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Volatile Organics by GC/MS (EPA 8260B)

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Date Extracted	Date Analyzed	Matrix
Method Blank	MBMN1202191			12/2/2019 6:00	12/2/2019 7:12	Soil

ANALYTE	CAS #	µg/kg	ANALYTE	CAS #	µg/kg
t-Amyl methyl ether (TAME)	994-05-8	<10	trans-1,3-Dichloropropene	10061-02-6	<2.5
Benzene	71-43-2	<2.0	Diisopropyl ether (DIPE)	108-20-3	<10
Bromobenzene	108-86-1	<2.5	Ethyl t-butyl ether (ETBE)	637-92-3	<10
Bromochloromethane	74-97-5	<2.5	Ethylbenzene	100-41-4	<2.5
Bromodichloromethane	75-27-4	<2.5	Hexachlorobutadiene	87-68-3	<5.0
Bromoform	75-25-2	<2.5	Isopropylbenzene	98-82-8	<2.5
Bromomethane	74-83-9	<10	4-Isopropyltoluene	99-87-6	<2.5
tert-Butyl alcohol (TBA)	75-65-0	<50	Methyl t-butyl ether (MTBE)	1634-04-4	<5.0
n-Butylbenzene	104-51-8	<2.5	Methylene chloride	75-09-2	<10
sec-Butylbenzene	135-98-8	<2.5	Naphthalene	91-20-3	<2.5
tert-Butylbenzene	98-06-6	<2.5	n-Propylbenzene	103-65-1	<2.5
Carbon tetrachloride	56-23-5	<2.5	Styrene	100-42-5	<2.5
Chlorobenzene	108-90-7	<2.5	1,1,1,2-Tetrachloroethane	630-20-6	<2.5
Chloroethane	75-00-3	<5.0	1,1,2,2-Tetrachloroethane	79-34-5	<2.5
Chloroform	67-66-3	<2.5	Tetrachloroethene	127-18-4	<2.5
Chloromethane	74-87-3	<5.0	Toluene	108-88-3	<2.5
2-Chlorotoluene	95-49-8	<2.5	1,2,3-Trichlorobenzene	87-61-6	<2.5
4-Chlorotoluene	106-43-4	<2.5	1,2,4-Trichlorobenzene	120-82-1	<2.5
Dibromochloromethane	124-48-1	<2.5	1,1,1-Trichloroethane	71-55-6	<2.5
1,2-Dibromo-3-chloropropane	96-12-8	<5.0	1,1,2-Trichloroethane	79-00-5	<2.5
1,2-Dibromoethane	106-93-4	<2.5	Trichloroethene	79-01-6	<2.5
Dibromomethane	74-95-3	<2.5	Trichlorofluoromethane	75-69-4	<5.0
1,2-Dichlorobenzene	95-50-1	<2.5	1,2,3-Trichloropropane	96-18-4	<2.5
1,3-Dichlorobenzene	541-73-1	<2.5	1,2,4-Trimethylbenzene	95-63-6	<2.5
1,4-Dichlorobenzene	106-46-7	<2.5	1,3,5-Trimethylbenzene	108-67-8	<2.5
Dichlorodifluoromethane	75-71-8	<2.5	Vinyl Chloride	75-01-4	<2.5
1,1-Dichloroethane	75-34-3	<2.5	Xylenes, Total	1330-20-7	<2.0
1,2-Dichloroethane	107-06-2	<2.5			
1,1-Dichloroethene	75-35-4	<2.5			
cis-1,2-Dichloroethene	156-59-2	<2.5			
trans-1,2-Dichloroethene	156-60-5	<2.5			
1,2-Dichloropropane	78-87-5	<2.5			
1,3-Dichloropropane	142-28-9	<2.5			
2,2-Dichloropropane	594-20-7	<2.5			
1,1-Dichloropropene	563-58-6	<2.5			
cis-1,3-Dichloropropene	10061-01-5	<2.5			

Surrogate:	% RC	Acceptable % RC
Dibromofluoromethane:	61	50-133 %
Toluene-d8:	64	61-130 %
4-Bromofluorobenzene:	69	46-130 %

Dilution Factor: 1

Data Qualifiers: None

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organics

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-1-0	24756-001	11/27/2019	16:50	11/27/2019	8:35	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/02/19 11:02	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	60	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-1-2	24756-002	11/27/2019	16:50	11/27/2019	8:40	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/02/19 11:28	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	61	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-1+5-0	24756-003	11/27/2019	16:50	11/27/2019	8:45	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/02/19 12:11	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	61	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-1+5-2	24756-004	11/27/2019	16:50	11/27/2019	8:50	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 09:24	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	59	50 - 133%	--

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organics

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-2-0	24756-005	11/27/2019	16:50	11/27/2019	8:55	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 09:45	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	59	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-2-2	24756-006	11/27/2019	16:50	11/27/2019	9:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 10:06	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	57	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-3-0	24756-007	11/27/2019	16:50	11/27/2019	9:05	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 10:30	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-3-2	24756-008	11/27/2019	16:50	11/27/2019	9:10	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 10:52	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organics

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-4-0	24756-009	11/27/2019	16:50	11/27/2019	9:15	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 11:13	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-4-1	24756-010	11/27/2019	16:50	11/27/2019	9:20	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 11:35	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-5-0	24756-011	11/27/2019	16:50	11/27/2019	9:25	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 11:57	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	64	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-5-2	24756-012	11/27/2019	16:50	11/27/2019	9:30	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 12:19	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	62	50 - 133%	--

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organics

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-6-0	24756-013	11/27/2019	16:50	11/27/2019	9:35	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 12:41	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	62	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-6-2	24756-014	11/27/2019	16:50	11/27/2019	9:40	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 13:02	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-7-0	24756-015	11/27/2019	16:50	11/27/2019	9:45	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	0.32	mg/kg	12/02/19 06:00	12/03/19 13:45	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	62	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-7-2	24756-016	11/27/2019	16:50	11/27/2019	9:50	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 14:07	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organics

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-8-0	24756-017	11/27/2019	16:50	11/27/2019	9:55	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/03/19 14:29	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-8-1	24756-018	11/27/2019	16:50	11/27/2019	10:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	0.32	mg/kg	12/02/19 06:00	12/03/19 14:50	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-9-0	24756-019	11/27/2019	16:50	11/27/2019	11:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/03/19 15:10	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	61	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-9-2	24756-020	11/27/2019	16:50	11/27/2019	11:05	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/03/19 15:32	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	62	50 - 133%	--

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organics

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-10-0	24756-021	11/27/2019	16:50	11/27/2019	11:10	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/03/19 15:32	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	62	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-10-2	24756-022	11/27/2019	16:50	11/27/2019	11:20	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/03/19 16:36	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-11-0	24756-023	11/27/2019	16:50	11/27/2019	11:30	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/03/19 16:57	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-11-2	24756-024	11/27/2019	16:50	11/27/2019	11:40	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/04/19 10:50	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	64	50 - 133%	--

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organics

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-12-0	24756-025	11/27/2019	16:50	11/27/2019	12:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/04/19 11:12	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-12-2	24756-026	11/27/2019	16:50	11/27/2019	12:10	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/04/19 11:34	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	65	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-13-0	24756-027	11/27/2019	16:50	11/27/2019	12:30	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/04/19 11:55	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	64	50 - 133%	--

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-13-1	24756-028	11/27/2019	16:50	11/27/2019	12:40	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/04/19 12:17	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	65	50 - 133%	--

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Organics

Client Sample ID	Lab Sample Number	Date Received		Date Sampled		Matrix
GB-14-0	24756-029	11/27/2019	16:50	11/27/2019	12:50	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/04/19 12:39	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	63	50 - 133%	--

GB-14-2	24756-030	11/27/2019	16:50	11/27/2019	13:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/04/19 13:01	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	65	50 - 133%	--

Method Blank — Soil

MB ID	ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
MBHT1202193	GROs	8015M	<0.25	mg/kg	12/02/19 10:45	12/03/19 07:21	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	57	50 - 133%	--

Method Blank — Soil

MB ID	ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
MBMN1202191	GROs	8015M	<0.25	mg/kg	12/02/19 06:00	12/02/19 07:12	--	1

Surrogate	Result (%)	Limits	Qual
Dibromofluoromethane	61	50 - 133%	--

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-1-0	24756-001	11/27/2019 16:50	11/27/2019 8:35	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Barium	6010B	41	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Chromium	6010B	12	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Cobalt	6010B	3.4	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Copper	6010B	14	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Lead	6010B	14	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 14:46	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Nickel	6010B	5.4	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Vanadium	6010B	22	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1
Zinc	6010B	120	mg/kg	12/03/19 17:05	12/06/19 16:26	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-1-2	24756-002	11/27/2019 16:50	11/27/2019 8:40	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Arsenic	6010B	2.5	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Barium	6010B	51	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Chromium	6010B	14	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Cobalt	6010B	4.2	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Lead	6010B	5.4	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 14:51	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Nickel	6010B	5.5	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Vanadium	6010B	38	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1
Zinc	6010B	8.9	mg/kg	12/03/19 17:05	12/06/19 16:40	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-1+5-0	24756-003	11/27/2019 16:50	11/27/2019 8:45	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Barium	6010B	44	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Chromium	6010B	16	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Cobalt	6010B	3.8	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Copper	6010B	11	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Lead	6010B	9.5	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 14:53	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Nickel	6010B	5.4	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Vanadium	6010B	32	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1
Zinc	6010B	54	mg/kg	12/03/19 17:05	12/06/19 16:44	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-1+5-2	24756-004	11/27/2019 16:50	11/27/2019 8:50	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Barium	6010B	32	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Chromium	6010B	7.4	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Cobalt	6010B	4.7	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Copper	6010B	5.0	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Lead	6010B	3.6	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 14:55	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Nickel	6010B	4.5	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Vanadium	6010B	16	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1
Zinc	6010B	10	mg/kg	12/03/19 17:05	12/06/19 17:02	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-2-0	24756-005	11/27/2019 16:50	11/27/2019 8:55	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Barium	6010B	52	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Chromium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Cobalt	6010B	4.3	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Copper	6010B	14	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Lead	6010B	4.5	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 14:56	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Nickel	6010B	7.9	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Vanadium	6010B	26	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1
Zinc	6010B	55	mg/kg	12/03/19 17:05	12/06/19 17:04	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-2-2	24756-006	11/27/2019 16:50	11/27/2019 9:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Barium	6010B	30	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Chromium	6010B	15	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Cobalt	6010B	4.3	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Copper	6010B	6.2	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Lead	6010B	3.4	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:02	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Nickel	6010B	8.9	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Vanadium	6010B	27	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1
Zinc	6010B	21	mg/kg	12/03/19 17:05	12/06/19 17:07	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-3-0	24756-007	11/27/2019 16:50	11/27/2019 9:05	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Barium	6010B	48	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Chromium	6010B	10	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Cobalt	6010B	6.1	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Copper	6010B	12	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Lead	6010B	3.5	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:04	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Nickel	6010B	12	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Vanadium	6010B	26	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1
Zinc	6010B	49	mg/kg	12/03/19 17:05	12/06/19 17:09	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-3-2	24756-008	11/27/2019 16:50	11/27/2019 9:10	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Barium	6010B	15	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Chromium	6010B	9.3	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Cobalt	6010B	3.7	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Lead	6010B	3.8	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:05	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Nickel	6010B	3.5	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Vanadium	6010B	21	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1
Zinc	6010B	7.9	mg/kg	12/03/19 17:05	12/06/19 17:11	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-4-0	24756-009	11/27/2019 16:50	11/27/2019 9:15	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Barium	6010B	33	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Chromium	6010B	10	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Cobalt	6010B	3.4	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Copper	6010B	8.4	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Lead	6010B	3.7	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:07	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Nickel	6010B	7.2	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Vanadium	6010B	21	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1
Zinc	6010B	41	mg/kg	12/03/19 17:05	12/06/19 17:14	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-4-1	24756-010	11/27/2019 16:50	11/27/2019 9:20	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Barium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Chromium	6010B	13	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Cobalt	6010B	2.3	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Lead	6010B	3.6	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Mercury	7471A	0.99	mg/kg	12/03/19 15:01	12/04/19 15:09	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Nickel	6010B	3.4	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Vanadium	6010B	21	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1
Zinc	6010B	8.1	mg/kg	12/03/19 17:05	12/06/19 17:17	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-5-0	24756-011	11/27/2019 16:50	11/27/2019 9:25	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Barium	6010B	54	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Chromium	6010B	17	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Cobalt	6010B	4.3	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Copper	6010B	25	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Lead	6010B	9.1	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:11	--	1
Molybdenum	6010B	1.1	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Nickel	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Vanadium	6010B	22	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1
Zinc	6010B	120	mg/kg	12/03/19 17:05	12/06/19 17:19	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-5-2	24756-012	11/27/2019 16:50	11/27/2019 9:30	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Barium	6010B	13	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Chromium	6010B	16	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Cobalt	6010B	3.4	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Lead	6010B	4.0	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:12	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Nickel	6010B	7.0	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Vanadium	6010B	31	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1
Zinc	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:22	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-6-0	24756-013	11/27/2019 16:50	11/27/2019 9:35	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Arsenic	6010B	3.2	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Barium	6010B	43	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Chromium	6010B	10	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Cobalt	6010B	4.0	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Copper	6010B	7.0	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Lead	6010B	4.8	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:14	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Nickel	6010B	4.8	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Vanadium	6010B	25	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1
Zinc	6010B	22	mg/kg	12/03/19 17:05	12/06/19 17:24	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-6-2	24756-014	11/27/2019 16:50	11/27/2019 9:40	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Arsenic	6010B	4.3	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Barium	6010B	22	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Chromium	6010B	6.9	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Cobalt	6010B	3.6	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Lead	6010B	4.7	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:16	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Nickel	6010B	3.9	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Vanadium	6010B	14	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1
Zinc	6010B	14	mg/kg	12/03/19 17:05	12/06/19 17:32	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-7-0	24756-015	11/27/2019 16:50	11/27/2019 9:45	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Arsenic	6010B	2.4	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Barium	6010B	35	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Chromium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Cobalt	6010B	3.5	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Copper	6010B	6.8	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Lead	6010B	5.3	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:17	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Nickel	6010B	4.2	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Vanadium	6010B	23	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1
Zinc	6010B	34	mg/kg	12/03/19 17:05	12/06/19 17:35	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-7-2	24756-016	11/27/2019 16:50	11/27/2019 9:50	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Barium	6010B	17	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Chromium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Cobalt	6010B	3.8	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Lead	6010B	4.3	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:23	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Nickel	6010B	5.2	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Vanadium	6010B	23	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1
Zinc	6010B	8.1	mg/kg	12/03/19 17:05	12/06/19 17:38	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-8-0	24756-017	11/27/2019 16:50	11/27/2019 9:55	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Arsenic	6010B	2.5	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Barium	6010B	49	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Chromium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Cobalt	6010B	3.5	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Copper	6010B	6.8	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Lead	6010B	6.1	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:24	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Nickel	6010B	4.1	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Vanadium	6010B	23	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1
Zinc	6010B	38	mg/kg	12/03/19 17:05	12/06/19 17:41	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-8-1	24756-018	11/27/2019 16:50	11/27/2019 10:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Arsenic	6010B	2.4	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Barium	6010B	400	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Chromium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Cobalt	6010B	3.3	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Copper	6010B	6.1	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Lead	6010B	5.4	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:26	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Nickel	6010B	4.7	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Vanadium	6010B	29	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1
Zinc	6010B	17	mg/kg	12/03/19 17:05	12/06/19 17:44	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-9-0	24756-019	11/27/2019 16:50	11/27/2019 11:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Barium	6010B	33	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Chromium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Cobalt	6010B	3.1	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Copper	6010B	10	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Lead	6010B	5.6	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:28	--	1
Molybdenum	6010B	2.3	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Nickel	6010B	5.2	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Vanadium	6010B	22	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1
Zinc	6010B	31	mg/kg	12/03/19 17:05	12/06/19 17:47	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-9-2	24756-020	11/27/2019 16:50	11/27/2019 11:05	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Barium	6010B	110	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Chromium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Cobalt	6010B	3.3	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Lead	6010B	4.1	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:30	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Nickel	6010B	4.7	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Vanadium	6010B	25	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1
Zinc	6010B	11	mg/kg	12/03/19 17:05	12/06/19 17:49	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-10-0	24756-021	11/27/2019 16:50	11/27/2019 11:10	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Arsenic	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Barium	6010B	63	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Beryllium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Cadmium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Chromium	6010B	12	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Cobalt	6010B	6.9	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Copper	6010B	24	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Lead	6010B	4.4	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:37	--	1
Molybdenum	6010B	1.0	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Nickel	6010B	12	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Selenium	6010B	<4.8	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Silver	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Thallium	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Vanadium	6010B	29	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1
Zinc	6010B	93	mg/kg	12/02/19 09:00	12/03/19 20:53	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-10-2	24756-022	11/27/2019 16:50	11/27/2019 11:20	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Arsenic	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Barium	6010B	19	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Beryllium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Cadmium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Chromium	6010B	11	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Cobalt	6010B	4.2	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Copper	6010B	<5.0	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Lead	6010B	5.0	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:45	--	1
Molybdenum	6010B	<1.0	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Nickel	6010B	4.9	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Selenium	6010B	<4.8	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Silver	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Thallium	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Vanadium	6010B	25	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1
Zinc	6010B	11	mg/kg	12/02/19 09:00	12/03/19 20:57	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-11-0	24756-023	11/27/2019 16:50	11/27/2019 11:30	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Arsenic	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Barium	6010B	37	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Beryllium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Cadmium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Chromium	6010B	9.2	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Cobalt	6010B	3.3	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Copper	6010B	11	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Lead	6010B	4.5	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:47	--	1
Molybdenum	6010B	<1.0	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Nickel	6010B	4.5	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Selenium	6010B	<4.8	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Silver	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Thallium	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Vanadium	6010B	19	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1
Zinc	6010B	54	mg/kg	12/02/19 09:00	12/03/19 21:01	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-11-2	24756-024	11/27/2019 16:50	11/27/2019 11:40	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Arsenic	6010B	2.6	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Barium	6010B	13	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Beryllium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Cadmium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Chromium	6010B	11	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Cobalt	6010B	1.9	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Copper	6010B	<5.0	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Lead	6010B	4.0	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:49	--	1
Molybdenum	6010B	<1.0	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Nickel	6010B	3.0	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Selenium	6010B	<4.8	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Silver	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Thallium	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Vanadium	6010B	26	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1
Zinc	6010B	5.6	mg/kg	12/02/19 09:00	12/03/19 21:04	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-12-0	24756-025	11/27/2019 16:50	11/27/2019 12:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Arsenic	6010B	4.2	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Barium	6010B	20	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Beryllium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Cadmium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Chromium	6010B	7.4	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Cobalt	6010B	3.0	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Copper	6010B	<5.0	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Lead	6010B	4.3	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:50	--	1
Molybdenum	6010B	<1.0	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Nickel	6010B	2.9	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Selenium	6010B	<4.8	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Silver	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Thallium	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Vanadium	6010B	15	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1
Zinc	6010B	31	mg/kg	12/02/19 09:00	12/03/19 21:08	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-12-2	24756-026	11/27/2019 16:50	11/27/2019 12:10	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Arsenic	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Barium	6010B	31	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Beryllium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Cadmium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Chromium	6010B	7.7	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Cobalt	6010B	2.8	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Copper	6010B	<5.0	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Lead	6010B	7.2	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:52	--	1
Molybdenum	6010B	<1.0	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Nickel	6010B	3.1	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Selenium	6010B	<4.8	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Silver	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Thallium	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Vanadium	6010B	16	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1
Zinc	6010B	24	mg/kg	12/02/19 09:00	12/03/19 21:12	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-13-0	24756-027	11/27/2019 16:50	11/27/2019 12:30	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Barium	6010B	27	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Chromium	6010B	8.2	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Cobalt	6010B	3.5	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Copper	6010B	7.8	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Lead	6010B	4.3	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:54	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Nickel	6010B	3.5	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Vanadium	6010B	17	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1
Zinc	6010B	25	mg/kg	12/03/19 17:05	12/06/19 18:22	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-13-1	24756-028	11/27/2019 16:50	11/27/2019 12:40	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Barium	6010B	35	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Chromium	6010B	11	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Cobalt	6010B	3.5	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Copper	6010B	8.2	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Lead	6010B	4.0	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:56	--	1
Molybdenum	6010B	1.1	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Nickel	6010B	3.7	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Vanadium	6010B	17	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1
Zinc	6010B	27	mg/kg	12/03/19 17:05	12/06/19 18:25	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-14-0	24756-029	11/27/2019 16:50	11/27/2019 12:50	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Arsenic	6010B	5.9	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Barium	6010B	36	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Chromium	6010B	12	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Cobalt	6010B	3.8	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Copper	6010B	32	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Lead	6010B	6.0	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:57	--	1
Molybdenum	6010B	1.1	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Nickel	6010B	4.5	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Vanadium	6010B	19	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1
Zinc	6010B	120	mg/kg	12/03/19 17:05	12/06/19 18:28	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
GB-14-2	24756-030	11/27/2019 16:50	11/27/2019 13:00	Soil

ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Barium	6010B	14	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Chromium	6010B	6.5	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Cobalt	6010B	3.4	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Lead	6010B	3.5	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:59	--	1
Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Nickel	6010B	2.6	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Vanadium	6010B	15	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1
Zinc	6010B	14	mg/kg	12/03/19 17:05	12/06/19 18:36	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
Method Blank				Soil

MB ID	ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
MBIR1202191	Antimony	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Arsenic	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Barium	6010B	<1.0	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Beryllium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Cadmium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Chromium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Cobalt	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Copper	6010B	<5.0	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Lead	6010B	<0.80	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBSR1203192	Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 14:41	--	1
MBIR1202191	Molybdenum	6010B	<1.0	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Nickel	6010B	<1.0	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Selenium	6010B	<4.8	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Silver	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Thallium	6010B	<2.0	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Vanadium	6010B	<0.50	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1
MBIR1202191	Zinc	6010B	<5.0	mg/kg	12/02/19 09:00	12/03/19 20:20	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
Method Blank				Soil

MB ID	ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
MBJQ1203191	Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Barium	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Chromium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Cobalt	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Lead	6010B	<0.80	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBSR1203193	Mercury	7471A	<0.10	mg/kg	12/03/19 15:01	12/04/19 15:31	--	1
MBJQ1203191	Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Nickel	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Vanadium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1
MBJQ1203191	Zinc	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 16:14	--	1

Mr. Chris Livesey
GeoTek, Inc.
1384 Poinsettia Ave Ste A
Vista, CA, 92008

Lab Reference #: GTK 24756
Project Name: Fox Point Farms
Project #: 3611-SD

Metals

Client Sample ID	Lab Sample Number	Date Received	Date Sampled	Matrix
Method Blank				Soil

MB ID	ANALYTE	EPA Method	Result	Units	Date Extracted	Date Analyzed	Qual	DF
MBJQ1203192	Antimony	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Arsenic	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Barium	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Beryllium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Cadmium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Chromium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Cobalt	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Copper	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Lead	6010B	<0.80	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Molybdenum	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Nickel	6010B	<1.0	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Selenium	6010B	<4.8	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Silver	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Thallium	6010B	<2.0	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Vanadium	6010B	<0.50	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1
MBJQ1203192	Zinc	6010B	<5.0	mg/kg	12/03/19 17:05	12/06/19 17:57	--	1

QA/QC Report
for
Extactable Fuel Hydrocarbons (EPA 8015B/8015M)
Reporting units: ppm

Matrix Spike (MS) / Matrix Spike Duplicate (MSD)

Date of Extraction: 12/3/2019 10:53
Date of Analysis: 12/3/2019 13:17
Dup Date of Analysis: 12/3/2019 13:37
Laboratory Sample #: 24756-004
MS/MSD Qualifiers: None
Reference #: GTK 24756

Analyte	R1	SPC CONC	MS	MSD	%MS	%MSD	RPD	ACP %MS	ACP RPD	Qual
EFH as Diesel	0.00	1000	981	911	98	91	7	62-154	28	☐

Surrogate Recoveries for Spike Samples

Surrogate (%RC)	MS	MSD	Qual
Octacosane	81	79	☐

LCS	LCSD	Qual
80	80	☐

ACP % RC
45-170

Laboratory Control Sample

Date of Extraction: 12/3/2019 10:53
Date of Analysis: 12/3/2019 12:36
Dup Date of Analysis: 12/3/2019 12:56
Laboratory Sample #: BL1203191
LCS Qualifiers: None

Analyte	SPC CONC	LCS	LCSD	%LCS	%LCSD	RPD	ACP %LCS	ACP RPD	Qual
EFH as Diesel	1000	906	909	91	91	0	70-140	20	☐

QA/QC Report
for
Extactable Fuel Hydrocarbons (EPA 8015B/8015M)
Reporting units: ppm

Matrix Spike (MS) / Matrix Spike Duplicate (MSD)

Date of Extraction: 12/3/2019 14:22
Date of Analysis: 12/4/2019 6:00
Dup Date of Analysis: 12/4/2019 6:21
Laboratory Sample #: 24756-024
MS/MSD Qualifiers: None
Reference #: GTK 24756

Analyte	R1	SPC CONC	MS	MSD	%MS	%MSD	RPD	ACP %MS	ACP RPD	Qual
EFH as Diesel	0.00	1000	918	882	92	88	4	62-154	28	☐

Surrogate Recoveries for Spike Samples

Surrogate (%RC)	MS	MSD	Qual
Octacosane	79	76	☐

LCS	LCSD	Qual
80	80	☐

ACP % RC
45-170

Laboratory Control Sample

Date of Extraction: 12/3/2019 14:22
Date of Analysis: 12/4/2019 5:19
Dup Date of Analysis: 12/4/2019 5:39
Laboratory Sample #: BL1203192
LCS Qualifiers: None

Analyte	SPC CONC	LCS	LCSD	%LCS	%LCSD	RPD	ACP %LCS	ACP RPD	Qual
EFH as Diesel	1000	874	910	87	91	4	70-140	20	☐

QA/QC Report
for
Organochlorine Pesticides (EPA 8081A)

Reporting units: ppb

Matrix Spike (MS) / Matrix Spike Duplicate (MSD)

Date of Extraction: 11/29/2019 10:00
Date of Analysis: 12/4/2019 12:52
Dup Date of Analysis: 12/4/2019 13:07
Laboratory Sample #: 24756-008
MS/MSD Qualifiers: None
Reference #: GTK 24756

Analyte	R1	SPC CONC	MS	MSD	%MS	%MSD	RPD	ACP %MS	ACP RPD	Qual
Gamma-BHC	0.00	20.0	14.3	16.1	72	81	12	41-130	25	☐
Heptachlor	0.00	20.0	13.4	15.3	67	76	13	36-130	26	☐
Aldrin	0.00	20.0	12.8	15.8	64	79	21	41-130	25	☐
Dieldrin	0.00	40.0	38.9	41.7	97	104	7	39-137	23	☐
Endrin	0.00	40.0	39.1	41.8	98	104	7	46-150	25	☐
DDT	0.00	40.0	45.1	47.4	113	119	5	41-148	25	☐

Surrogate Recoveries for Spike Samples

Surrogate (%RC)	MS	MSD	Qual
Decachlorobiphenyl	104	101	☐

LCS	LCSD	Qual
105	104	☐

ACP % RC
49-131

Laboratory Control Sample

Date of Extraction: 11/29/2019 10:00
Date of Analysis: 12/3/2019 13:27
Dup Date of Analysis: 12/3/2019 13:42
Laboratory Sample #: AV1129191A
LCS Qualifiers: None

Analyte	SPC CONC	LCS	LCSD	%LCS	%LCSD	RPD	ACP %LCS	ACP RPD	Qual
Gamma-BHC	20.0	17.0	15.0	85	75	13	45-130	25	☐
Heptachlor	20.0	15.5	13.1	77	66	17	42-130	27	☐
Aldrin	20.0	16.6	14.0	83	70	17	44-130	26	☐
Dieldrin	40.0	40.8	39.4	102	99	3	43-131	20	☐
Endrin	40.0	40.8	40.2	102	100	1	47-145	20	☐
DDT	40.0	46.1	48.8	115	122	6	45-140	20	☐

QA/QC Report
for
Organochlorine Pesticides (EPA 8081A)

Reporting units: ppb

Matrix Spike (MS) / Matrix Spike Duplicate (MSD)

Date of Extraction: 12/3/2019 7:30
Date of Analysis: 12/5/2019 10:57
Dup Date of Analysis: 12/5/2019 11:11
Laboratory Sample #: 24756-020
MS/MSD Qualifiers: None
Reference #: GTK 24756

Analyte	R1	SPC CONC	MS	MSD	%MS	%MSD	RPD	ACP %MS	ACP RPD	Qual
Gamma-BHC	0.00	20.0	16.6	16.7	83	84	1	41-130	25	☐
Heptachlor	0.00	20.0	15.3	14.0	76	70	9	36-130	26	☐
Aldrin	0.00	20.0	16.6	15.4	83	77	8	41-130	25	☐
Dieldrin	0.00	40.0	42.3	44.8	106	112	6	39-137	23	☐
Endrin	0.00	40.0	43.9	46.0	110	115	5	46-150	25	☐
DDT	0.00	40.0	54.6	55.7	137	139	2	41-148	25	☐

Surrogate Recoveries for Spike Samples

Surrogate (%RC)	MS	MSD	Qual
Decachlorobiphenyl	109	107	☐

LCS	LCSD	Qual
108	108	☐

ACP % RC
49-131

Laboratory Control Sample

Date of Extraction: 12/3/2019 7:30
Date of Analysis: 12/5/2019 10:27
Dup Date of Analysis: 12/5/2019 10:42
Laboratory Sample #: AV1203191A
LCS Qualifiers: None

Analyte	SPC CONC	LCS	LCSD	%LCS	%LCSD	RPD	ACP %LCS	ACP RPD	Qual
Gamma-BHC	20.0	16.4	16.2	82	81	1	45-130	25	☐
Heptachlor	20.0	14.2	14.2	71	71	0	42-130	27	☐
Aldrin	20.0	15.2	15.0	76	75	1	44-130	26	☐
Dieldrin	40.0	44.8	41.2	112	103	8	43-131	20	☐
Endrin	40.0	45.1	42.1	113	105	7	47-145	20	☐
DDT	40.0	54.3	50.8	136	127	7	45-140	20	☐

QA/QC Report
for
Polychlorinated Biphenyl's (EPA 8082)
Reporting units: ppb

Matrix Spike (MS) / Matrix Spike Duplicate (MSD)

Date of Extraction: 11/29/2019 10:00
Date of Analysis: 12/4/2019 18:27
Dup Date of Analysis: 12/4/2019 18:41
Laboratory Sample #: 24756-008
MS/MSD Qualifiers: R2,
Reference #: GTK 24756

Analyte	R1	SPC CONC	MS	MSD	%MS	%MSD	RPD	ACP %MS	ACP RPD	Qual
PCB-1016	0.00	150	124	160	83	107	25	39-130	20	☑
PCB-1260	0.00	150	130	134	87	89	3	39-141	20	☐

Surrogate Recoveries for Spike Samples

Surrogate (%RC)	MS	MSD	Qual
Decachlorobiphenyl	90	88	☐

LCS	LCSD	Qual
94	107	☐

ACP % RC
49-131

Laboratory Control Sample

Date of Extraction: 11/29/2019 10:00
Date of Analysis: 12/3/2019 13:57
Dup Date of Analysis: 12/3/2019 14:11
Laboratory Sample #: AV1129191B
LCS Qualifiers: None

Analyte	SPC CONC	LCS	LCSD	%LCS	%LCSD	RPD	ACP %LCS	ACP RPD	Qual
PCB-1016	150	135	115	90	77	16	39-130	23	☐
PCB-1260	150	169	143	113	95	17	54-130	20	☐

QA/QC Report
for
Volatile Organic Compounds (EPA 8260B)
Reporting units: ppb

Matrix Spike (MS) / Matrix Spike Duplicate (MSD)

Date of Extraction: 12/2/2019 5:50
Date of Analysis: 12/2/2019 8:13
Dup Date of Analysis: 12/2/2019 8:33
Laboratory Sample #: 24755-001
MS/MSD Qualifiers: None
Reference #: GTK 24756

Analyte	R1	SPC CONC	MS	MSD	%MS	%MSD	RPD	ACP %MS	ACP RPD	Qual
1,1-Dichloroethene	0.00	10.0	8.98	8.96	90	90	0	54-130	20	☐
Benzene	0.00	10.0	10.5	10.4	105	104	1	70-133	20	☐
Trichloroethene	0.00	10.0	12.7	12.4	127	124	2	70-135	20	☐
Toluene	0.00	10.0	10.4	10.1	104	101	3	57-135	20	☐
Chlorobenzene	0.00	10.0	11.5	11.1	115	111	4	70-132	20	☐

Surrogate Recoveries for Spike Samples

Surrogate (%RC)	MS	MSD	Qual	LCS	LCSD	Qual	ACP % RC
Dibromofluoromethane	61	62	☐	60	62	☐	50-133
Toluene-d8	65	65	☐	64	65	☐	61-130
4-Bromofluorobenzene	71	71	☐	69	71	☐	46-130

Laboratory Control Sample

Date of Extraction: 12/2/2019 5:50
Date of Analysis: 12/2/2019 7:32
Dup Date of Analysis: 12/2/2019 7:52
Laboratory Sample #: MN1202191
LCS Qualifiers: None

Analyte	SPC CONC	LCS	LCSD	%LCS	%LCSD	RPD	ACP %LCS	ACP RPD	Qual
1,1-Dichloroethene	10.0	7.97	9.22	80	92	15	55-130	20	☐
Benzene	10.0	9.40	10.9	94	109	15	70-133	20	☐
Trichloroethene	10.0	11.5	13.0	115	130	12	70-134	20	☐
Toluene	10.0	9.22	10.3	92	103	11	57-134	20	☐
Chlorobenzene	10.0	10.0	11.4	100	114	13	70-131	20	☐

QA/QC Report
for
Volatile Organic Compounds (EPA 8260B)
Reporting units: ppb

Matrix Spike (MS) / Matrix Spike Duplicate (MSD)

Date of Extraction: 12/3/2019 6:17
Date of Analysis: 12/3/2019 8:42
Dup Date of Analysis: 12/3/2019 9:03
Laboratory Sample #: 24756-004
MS/MSD Qualifiers: None
Reference #: GTK 24756

Analyte	R1	SPC CONC	MS	MSD	%MS	%MSD	RPD	ACP %MS	ACP RPD	Qual
1,1-Dichloroethene	0.00	10.0	8.22	7.95	82	79	3	54-130	20	☐
Benzene	0.00	10.0	10.2	10.3	102	103	1	70-133	20	☐
Trichloroethene	0.00	10.0	12.4	12.1	124	121	2	70-135	20	☐
Toluene	0.00	10.0	10.9	10.9	109	109	0	57-135	20	☐
Chlorobenzene	0.00	10.0	12.3	12.1	123	121	2	70-132	20	☐

Surrogate Recoveries for Spike Samples

Surrogate (%RC)	MS	MSD	Qual	LCS	LCSD	Qual	ACP % RC
Dibromofluoromethane	58	59	☐	58	58	☐	50-133
Toluene-d8	69	69	☐	68	68	☐	61-130
4-Bromofluorobenzene	77	77	☐	76	77	☐	46-130

Laboratory Control Sample

Date of Extraction: 12/3/2019 6:17
Date of Analysis: 12/3/2019 8:02
Dup Date of Analysis: 12/3/2019 8:22
Laboratory Sample #: MN1203191
LCS Qualifiers: None

Analyte	SPC CONC	LCS	LCSD	%LCS	%LCSD	RPD	ACP %LCS	ACP RPD	Qual
1,1-Dichloroethene	10.0	8.78	7.88	88	79	11	55-130	20	☐
Benzene	10.0	10.6	9.88	106	99	7	70-133	20	☐
Trichloroethene	10.0	12.8	12.1	128	121	6	70-134	20	☐
Toluene	10.0	11.2	10.3	112	103	8	57-134	20	☐
Chlorobenzene	10.0	12.4	11.7	124	117	6	70-131	20	☐

QA/QC Report
for
Volatile Organic Compounds (EPA 8260B)
Reporting units: ppb

Matrix Spike (MS) / Matrix Spike Duplicate (MSD)

Date of Extraction: 12/4/2019 7:32
Date of Analysis: 12/4/2019 10:07
Dup Date of Analysis: 12/4/2019 10:28
Laboratory Sample #: 24756-024
MS/MSD Qualifiers: None
Reference #: GTK 24756

Analyte	R1	SPC CONC	MS	MSD	%MS	%MSD	RPD	ACP %MS	ACP RPD	Qual
1,1-Dichloroethene	0.00	10.0	7.21	7.09	72	71	2	54-130	20	☐
Benzene	0.00	10.0	9.15	8.87	91	89	3	70-133	20	☐
Trichloroethene	0.00	10.0	10.8	10.6	108	106	2	70-135	20	☐
Toluene	0.00	10.0	9.50	9.42	95	94	1	57-135	20	☐
Chlorobenzene	0.00	10.0	10.9	10.5	109	105	4	70-132	20	☐

Surrogate Recoveries for Spike Samples

Surrogate (%RC)	MS	MSD	Qual	LCS	LCSD	Qual	ACP % RC
Dibromofluoromethane	63	65	☐	63	64	☐	50-133
Toluene-d8	71	72	☐	72	71	☐	61-130
4-Bromofluorobenzene	72	73	☐	73	73	☐	46-130

Laboratory Control Sample

Date of Extraction: 12/4/2019 7:32
Date of Analysis: 12/4/2019 9:24
Dup Date of Analysis: 12/4/2019 9:45
Laboratory Sample #: MN1204191
LCS Qualifiers: None

Analyte	SPC CONC	LCS	LCSD	%LCS	%LCSD	RPD	ACP %LCS	ACP RPD	Qual
1,1-Dichloroethene	10.0	8.12	8.63	81	86	6	55-130	20	☐
Benzene	10.0	10.1	9.75	101	98	4	70-133	20	☐
Trichloroethene	10.0	11.6	12.1	116	121	4	70-134	20	☐
Toluene	10.0	10.5	10.1	105	101	4	57-134	20	☐
Chlorobenzene	10.0	11.5	11.7	115	117	2	70-131	20	☐

QA/QC Report
for
Metals

Reference #: GTK 24756 Reporting units: ppm

Matrix Spike (MS) / Matrix Spike Duplicate (MSD) **6010B/7471A**

Laboratory Sample #: AZ12181-001 **Date of Extraction:** 12/02/19 09:00

Analyte	MS Date of Analysis	MSD Date of Analysis	R1	SPC CONC	MS	MSD	% MS	% MSD	RPD	ACP %MS	ACP RPD	Qualifiers
Antimony	12/03/19 20:45	12/03/19 20:49	0.00	20.0	19.6	19.5	98	98	1	75-125	20	--
Arsenic	12/03/19 20:45	12/03/19 20:49	0.00	20.0	19.4	19.4	97	97	0	75-125	20	--
Barium	12/03/19 20:45	12/03/19 20:49	0.00	20.0	19.7	20.0	99	100	2	75-125	20	--
Beryllium	12/03/19 20:45	12/03/19 20:49	0.00	20.0	18.4	18.6	92	93	1	75-125	20	--
Cadmium	12/03/19 20:45	12/03/19 20:49	0.00	20.0	19.5	19.6	98	98	1	75-125	20	--
Chromium	12/03/19 20:45	12/03/19 20:49	0.00	20.0	19.8	20.1	99	101	2	75-125	20	--
Cobalt	12/03/19 20:45	12/03/19 20:49	0.00	20.0	21.2	21.3	106	106	0	75-125	20	--
Copper	12/03/19 20:45	12/03/19 20:49	0.00	20.0	20.6	20.8	103	104	1	75-125	20	--
Lead	12/03/19 20:45	12/03/19 20:49	0.00	20.0	19.9	20.2	99	101	1	75-125	20	--
Molybdenum	12/03/19 20:45	12/03/19 20:49	0.00	20.0	18.5	18.6	93	93	1	75-125	20	--
Nickel	12/03/19 20:45	12/03/19 20:49	0.00	20.0	21.0	21.0	105	105	0	75-125	20	--
Selenium	12/03/19 20:45	12/03/19 20:49	0.00	20.0	17.8	18.9	89	94	6	75-125	20	--
Silver	12/03/19 20:45	12/03/19 20:49	0.00	20.0	18.2	18.5	91	93	2	75-125	20	--
Thallium	12/03/19 20:45	12/03/19 20:49	0.00	20.0	20.1	20.0	101	100	0	75-125	20	--
Vanadium	12/03/19 20:45	12/03/19 20:49	0.00	20.0	18.3	18.4	91	92	1	75-125	20	--
Zinc	12/03/19 20:45	12/03/19 20:49	0.00	20.0	21.8	23.0	109	115	5	75-125	20	--

Laboratory Control Spike (LCS) / Laboratory Control Spike Duplicate (LCSD) **6010B/7471A**

Laboratory Sample #: IR1202191 **Date of Extraction:** 12/02/19 09:00

Analyte	LCS Date of Analysis	LCSD Date of Analysis		SPC CONC	LCS	LCSD	% LCS	% LCSD	RPD	ACP %LCS	ACP RPD	Qualifiers
Antimony	12/03/19 20:25	12/03/19 20:29	--	20.0	19.5	19.9	98	99	2	80-120	20	--
Arsenic	12/03/19 20:25	12/03/19 20:29	--	20.0	19.4	19.3	97	96	1	80-120	20	--
Barium	12/03/19 20:25	12/03/19 20:29	--	20.0	19.3	19.6	96	98	2	80-120	20	--
Beryllium	12/03/19 20:25	12/03/19 20:29	--	20.0	18.6	18.7	93	94	1	80-120	20	--
Cadmium	12/03/19 20:25	12/03/19 20:29	--	20.0	19.9	19.8	99	99	1	80-120	20	--
Chromium	12/03/19 20:25	12/03/19 20:29	--	20.0	19.9	20.2	99	101	1	80-120	20	--
Cobalt	12/03/19 20:25	12/03/19 20:29	--	20.0	21.4	21.3	107	106	0	80-120	20	--
Copper	12/03/19 20:25	12/03/19 20:29	--	20.0	21.1	21.3	106	106	1	80-120	20	--
Lead	12/03/19 20:25	12/03/19 20:29	--	20.0	20.4	20.5	102	102	0	80-120	20	--
Molybdenum	12/03/19 20:25	12/03/19 20:29	--	20.0	18.8	18.7	94	94	1	80-120	20	--
Nickel	12/03/19 20:25	12/03/19 20:29	--	20.0	21.2	21.0	106	105	1	80-120	20	--
Selenium	12/03/19 20:25	12/03/19 20:29	--	20.0	17.6	18.1	88	91	3	80-120	20	--
Silver	12/03/19 20:25	12/03/19 20:29	--	20.0	18.9	19.1	94	96	1	80-120	20	--
Thallium	12/03/19 20:25	12/03/19 20:29	--	20.0	20.5	20.4	102	102	0	80-120	20	--
Vanadium	12/03/19 20:25	12/03/19 20:29	--	20.0	18.5	18.6	93	93	1	80-120	20	--
Zinc	12/03/19 20:25	12/03/19 20:29	--	20.0	21.5	21.3	108	106	1	80-120	20	--

QA/QC Report
for
Metals

Reference #: GTK 24756 Reporting units: ppm

Matrix Spike (MS) / Matrix Spike Duplicate (MSD) **6010B/7471A**

Laboratory Sample #: 24756-001 **Date of Extraction:** 12/03/19 17:05

Analyte	MS Date of Analysis	MSD Date of Analysis	R1	SPC CONC	MS	MSD	% MS	% MSD	RPD	ACP %MS	ACP RPD	Qualifiers
Antimony	12/06/19 16:31	12/06/19 16:35	0.00	20.0	7.02	7.46	35	37	6	75-125	20	M2,
Arsenic	12/06/19 16:31	12/06/19 16:35	0.00	20.0	21.4	21.3	107	106	0	75-125	20	--
Barium	12/06/19 16:31	12/06/19 16:35	41.0	20.0	59.9	58.1	95	85	3	75-125	20	--
Beryllium	12/06/19 16:31	12/06/19 16:35	0.00	20.0	20.0	19.6	100	98	2	75-125	20	--
Cadmium	12/06/19 16:31	12/06/19 16:35	0.00	20.0	19.9	19.7	99	99	1	75-125	20	--
Chromium	12/06/19 16:31	12/06/19 16:35	12.0	20.0	32.3	31.5	101	98	3	75-125	20	--
Cobalt	12/06/19 16:31	12/06/19 16:35	3.40	20.0	24.2	23.6	104	101	3	75-125	20	--
Copper	12/06/19 16:31	12/06/19 16:35	14.0	20.0	36.1	34.8	110	104	4	75-125	20	--
Lead	12/06/19 16:31	12/06/19 16:35	14.0	20.0	34.1	31.9	100	89	7	75-125	20	--
Molybdenum	12/06/19 16:31	12/06/19 16:35	0.00	20.0	17.6	17.7	88	89	1	75-125	20	--
Nickel	12/06/19 16:31	12/06/19 16:35	5.40	20.0	26.8	26.4	107	105	2	75-125	20	--
Selenium	12/06/19 16:31	12/06/19 16:35	0.00	20.0	19.8	17.5	99	88	12	75-125	20	--
Silver	12/06/19 16:31	12/06/19 16:35	0.00	20.0	18.7	18.6	94	93	1	75-125	20	--
Thallium	12/06/19 16:31	12/06/19 16:35	0.00	20.0	19.6	19.3	98	96	2	75-125	20	--
Vanadium	12/06/19 16:31	12/06/19 16:35	22.0	20.0	42.5	40.7	102	94	4	75-125	20	--
Zinc	12/06/19 16:31	12/06/19 16:35	120	20.0	134	117	70	0	14	75-125	20	M3,

Laboratory Control Spike (LCS) / Laboratory Control Spike Duplicate (LCSD) **6010B/7471A**

Laboratory Sample #: JQ1203191 **Date of Extraction:** 12/03/19 17:05

Analyte	LCS Date of Analysis	LCSD Date of Analysis		SPC CONC	LCS	LCSD	% LCS	% LCSD	RPD	ACP %LCS	ACP RPD	Qualifiers
Antimony	12/06/19 16:18	12/06/19 16:22	--	20.0	22.7	23.1	114	116	2	80-120	20	--
Arsenic	12/06/19 16:18	12/06/19 16:22	--	20.0	20.3	20.8	101	104	2	80-120	20	--
Barium	12/06/19 16:18	12/06/19 16:22	--	20.0	20.3	21.2	101	106	4	80-120	20	--
Beryllium	12/06/19 16:18	12/06/19 16:22	--	20.0	20.0	20.0	100	100	0	80-120	20	--
Cadmium	12/06/19 16:18	12/06/19 16:22	--	20.0	20.4	21.0	102	105	3	80-120	20	--
Chromium	12/06/19 16:18	12/06/19 16:22	--	20.0	20.8	21.3	104	106	2	80-120	20	--
Cobalt	12/06/19 16:18	12/06/19 16:22	--	20.0	21.8	22.3	109	111	2	80-120	20	--
Copper	12/06/19 16:18	12/06/19 16:22	--	20.0	22.2	22.7	111	114	2	80-120	20	--
Lead	12/06/19 16:18	12/06/19 16:22	--	20.0	20.5	20.8	102	104	1	80-120	20	--
Molybdenum	12/06/19 16:18	12/06/19 16:22	--	20.0	19.4	19.8	97	99	2	80-120	20	--
Nickel	12/06/19 16:18	12/06/19 16:22	--	20.0	22.0	22.6	110	113	3	80-120	20	--
Selenium	12/06/19 16:18	12/06/19 16:22	--	20.0	18.6	19.5	93	98	5	80-120	20	--
Silver	12/06/19 16:18	12/06/19 16:22	--	20.0	19.9	20.3	99	101	2	80-120	20	--
Thallium	12/06/19 16:18	12/06/19 16:22	--	20.0	20.1	20.4	101	102	1	80-120	20	--
Vanadium	12/06/19 16:18	12/06/19 16:22	--	20.0	19.7	20.1	99	101	2	80-120	20	--
Zinc	12/06/19 16:18	12/06/19 16:22	--	20.0	21.7	22.2	109	111	2	80-120	20	--

QA/QC Report
for
Metals

Reference #: GTK 24756 Reporting units: ppm

Matrix Spike (MS) / Matrix Spike Duplicate (MSD) **6010B/7471A**

Laboratory Sample #: 24768-001 **Date of Extraction:** 12/03/19 17:05

Analyte	MS Date of Analysis	MSD Date of Analysis	R1	SPC CONC	MS	MSD	% MS	% MSD	RPD	ACP %MS	ACP RPD	Qualifiers
Antimony	12/06/19 18:12	12/06/19 18:15	0.00	20.0	4.13	3.78	21	19	9	75-125	20	M2,
Arsenic	12/06/19 18:12	12/06/19 18:15	3.00	20.0	21.9	22.5	94	98	3	75-125	20	--
Barium	12/06/19 18:12	12/06/19 18:15	140	20.0	151	149	55	45	1	75-125	20	M3,
Beryllium	12/06/19 18:12	12/06/19 18:15	0.00	20.0	20.5	20.1	102	101	2	75-125	20	--
Cadmium	12/06/19 18:12	12/06/19 18:15	0.740	20.0	19.8	19.8	95	95	0	75-125	20	--
Chromium	12/06/19 18:12	12/06/19 18:15	15.0	20.0	35.1	35.3	100	101	1	75-125	20	--
Cobalt	12/06/19 18:12	12/06/19 18:15	6.80	20.0	26.6	26.2	99	97	2	75-125	20	--
Copper	12/06/19 18:12	12/06/19 18:15	9.60	20.0	30.1	29.9	102	101	1	75-125	20	--
Lead	12/06/19 18:12	12/06/19 18:15	5.40	20.0	24.7	24.2	97	94	2	75-125	20	--
Molybdenum	12/06/19 18:12	12/06/19 18:15	0.00	20.0	16.8	16.8	84	84	0	75-125	20	--
Nickel	12/06/19 18:12	12/06/19 18:15	9.20	20.0	29.7	29.2	103	100	2	75-125	20	--
Selenium	12/06/19 18:12	12/06/19 18:15	0.00	20.0	18.2	17.4	91	87	4	75-125	20	--
Silver	12/06/19 18:12	12/06/19 18:15	0.00	10.0	8.80	8.86	88	89	1	75-125	20	--
Thallium	12/06/19 18:12	12/06/19 18:15	0.00	20.0	14.8	15.1	74	76	2	75-125	20	M2,
Vanadium	12/06/19 18:12	12/06/19 18:15	38.0	20.0	58.9	57.7	105	99	2	75-125	20	--
Zinc	12/06/19 18:12	12/06/19 18:15	48.0	20.0	65.6	67.0	88	95	2	75-125	20	--

Laboratory Control Spike (LCS) / Laboratory Control Spike Duplicate (LCSD) **6010B/7471A**

Laboratory Sample #: JQ1203192 **Date of Extraction:** 12/03/19 17:05

Analyte	LCS Date of Analysis	LCSD Date of Analysis		SPC CONC	LCS	LCSD	% LCS	% LCSD	RPD	ACP %LCS	ACP RPD	Qualifiers
Antimony	12/06/19 18:05	12/06/19 18:07	--	20.0	22.4	22.8	112	114	2	80-120	20	--
Arsenic	12/06/19 18:05	12/06/19 18:07	--	20.0	20.7	21.1	104	106	2	80-120	20	--
Barium	12/06/19 18:05	12/06/19 18:07	--	20.0	19.9	20.1	99	101	1	80-120	20	--
Beryllium	12/06/19 18:05	12/06/19 18:07	--	20.0	20.2	20.6	101	103	2	80-120	20	--
Cadmium	12/06/19 18:05	12/06/19 18:07	--	20.0	20.9	21.1	104	106	1	80-120	20	--
Chromium	12/06/19 18:05	12/06/19 18:07	--	20.0	20.6	21.0	103	105	2	80-120	20	--
Cobalt	12/06/19 18:05	12/06/19 18:07	--	20.0	22.2	22.4	111	112	1	80-120	20	--
Copper	12/06/19 18:05	12/06/19 18:07	--	20.0	21.9	22.3	109	111	2	80-120	20	--
Lead	12/06/19 18:05	12/06/19 18:07	--	20.0	20.9	21.0	104	105	0	80-120	20	--
Molybdenum	12/06/19 18:05	12/06/19 18:07	--	20.0	19.7	19.8	99	99	1	80-120	20	--
Nickel	12/06/19 18:05	12/06/19 18:07	--	20.0	22.6	22.8	113	114	1	80-120	20	--
Selenium	12/06/19 18:05	12/06/19 18:07	--	20.0	18.5	20.8	93	104	12	80-120	20	--
Silver	12/06/19 18:05	12/06/19 18:07	--	10.0	9.55	9.73	96	97	2	80-120	20	--
Thallium	12/06/19 18:05	12/06/19 18:07	--	20.0	20.3	20.3	101	101	0	80-120	20	--
Vanadium	12/06/19 18:05	12/06/19 18:07	--	20.0	19.4	19.8	97	99	2	80-120	20	--
Zinc	12/06/19 18:05	12/06/19 18:07	--	20.0	22.3	22.3	111	111	0	80-120	20	--

Matrix Spike (MS) / Matrix Spike Duplicate (MSD) **6010B/7471A**

Laboratory Sample #: 24756-021 **Date of Extraction:** 12/03/19 15:01

Analyte	MS Date of Analysis	MSD Date of Analysis	R1	SPC CONC	MS	MSD	% MS	% MSD	RPD	ACP %MS	ACP RPD	Qualifiers
Mercury	12/04/19 15:38	12/04/19 15:44	0.00	1.00	0.899	0.899	90	90	0	80-120	20	--

QA/QC Report
for
Metals

Reference #: GTK 24756 Reporting units: ppm

Laboratory Control Spike (LCS) / Laboratory Control Spike Duplicate (LCSD) **6010B/7471A**

Laboratory Sample #: SR1203193 **Date of Extraction:** 12/03/19 15:01

Analyte	LCS Date of Analysis	LCSD Date of Analysis		SPC CONC	LCS	LCSD	% LCS	% LCSD	RPD	ACP %LCS	ACP RPD	Qualifiers
Mercury	12/04/19 15:33	12/04/19 15:35	--	1.00	0.879	0.915	88	92	4	80-120	20	--

Matrix Spike (MS) / Matrix Spike Duplicate (MSD) **6010B/7471A**

Laboratory Sample #: 24756-001 **Date of Extraction:** 12/03/19 15:01

Analyte	MS Date of Analysis	MSD Date of Analysis	R1	SPC CONC	MS	MSD	% MS	% MSD	RPD	ACP %MS	ACP RPD	Qualifiers
Mercury	12/04/19 14:48	12/04/19 14:50	0.00	1.00	1.00	0.963	100	96	4	80-120	20	--

Laboratory Control Spike (LCS) / Laboratory Control Spike Duplicate (LCSD) **6010B/7471A**

Laboratory Sample #: SR1203192 **Date of Extraction:** 12/03/19 15:01

Analyte	LCS Date of Analysis	LCSD Date of Analysis		SPC CONC	LCS	LCSD	% LCS	% LCSD	RPD	ACP %LCS	ACP RPD	Qualifiers
Mercury	12/04/19 14:43	12/04/19 14:44	--	1.00	0.892	0.907	89	91	2	80-120	20	--

Data Qualifier Definitions

Qualifier

D2 = Sample required dilution due to high concentration of target analyte.

M2 = Matrix spike recovery was low, the associated blank spike recovery was acceptable.

24756-001	6010B	Antimony	MS/MSD
24768-001	6010B	Antimony	MS/MSD
24768-001	6010B	Thallium	MS

M3 = The spike recovery value is unusable since the analyte concentration in the sample is disproportionate to spike level. The associated blank spike recovery was acceptable.

24756-001	6010B	Zinc	MS/MSD
24768-001	6010B	Barium	MS/MSD

N1 = See case narrative.

24756-026	8081A	Sample run at 13x dilution on 12/06/19 @ 14:36 for 4,4'-DDE @ 4.4'-DDD

R2 = RPD/RSD exceeded the laboratory acceptance limit.

24756-008	8082	PCB-1016	MS/MSD

S5 = Surrogate recovery was below laboratory acceptance limits.

S8 = The analysis of the sample required a dilution such that the surrogate recovery calculation does not provide any useful information. The associated blank spike recovery was acceptable.

Definition of terms:

R1	Result of unspiked laboratory sample used for matrix spike determination.
SP CONC (or Spike Conc.)	Spike concentration added to sample or blank
MS	Matrix Spike sample result
MSD	Matrix Spike Duplicate sample result
%MS	Percent recovery of MS: {(MS-R1) / SP CONC} x100
%MSD	Percent recovery of MSD: {(MSD-R1) / SP CONC} x 100
RPD (for MS/MSD)	Relative Percent Difference: {(MS-MSD) / (MS+MSD)} x 100 x 2
LCS	Laboratory Control Sample result
LCSD	Laboratory Control Sample Duplicate result
%LCS	Percent recovery of LCS: {(LCS) / SP CONC} x100
%LCSD	Percent recovery of LCSD: {(LCSD) / SP CONC} x 100
RPD (for LCS/LCSD)	Relative Percent Difference: {(LCS-LCSD) / (LCS+LCSD)} x 100 x 2
ACP %LCS	Acceptable percent recovery range for Laboratory Control Samples.
ACP %MS	Acceptable percent recovery range for Matrix Spike samples
ACP RPD	Acceptable Relative Percent Difference
D	Detectable, result must be greater than zero
Qual	A checked box indicates a data qualifier was utilized and/or required for this analyte see attached explanation.
ND	Analyte Not Detected

Analysis Request and Chain of Custody Record

Lab Job No: 24756
Page 1 of 3

ORANGE COAST ANALYTICAL, INC. www.ocalab.com
3002 Dow, Suite 532
Tustin, CA 92780
(714) 832-0064 Fax (714) 832-0067

4620 E. Elwood, Suite 4
Phoenix, AZ 85040
(480) 736-0960 Fax (480) 736-0970

REQUIRED TURN AROUND TIME: Standard: _____
72 Hours: _____ 48 Hours: _____ 24 Hours: _____

CUSTOMER INFORMATION		PROJECT INFORMATION	
COMPANY:	GeoTek, Inc.	PROJECT NAME:	Fox Point Farms
SEND REPORT TO:	Chris Livesey	NUMBER:	3611-SD
EMAIL:	clivesey@geotekusa.com	ADDRESS:	1150 Quail Gardens Dr, Encinitas
ADDRESS:	1384 Poinsettia Ave. Suite "A"		
	Vista, CA 92081	P.O. #	
PHONE: 949-338-9233	FAX:	SAMPLED BY:	CDL/SE

ANALYSIS REQUEST / PRESERVATIVE

	SAMPLE ID	NO. OF CONTAINERS	SAMPLE DATE	SAMPLE TIME	SAMPLE MATRIX	CONTAINER TYPE	PCBs	TPH	VOC	CAM 17	[illegible]					REMARKS/PRECAUTIONS
1	GB-1-0	1	11-27-19	835	SS	8oz	X	X	X	X	X					
2	GB-1-2	1		840			X	X	X	X	X					
3	GB-1+5-0	1		845			X	X	X	X	X					
4	GB-1+5-2	1		850			X	X	X	X	X					
5	GB-2-0	1		855				X	X	X	X					
6	GB-2-2	1		900				X	X	X	X					
7	GB-3-0	1		905				X	X	X	X					
8	GB-3-2	1		910				X	X	X	X					
9	GB-4-0	1		915				X	X	X	X					
10	GB-4-1	1		920				X	X	X	X					
11	GB-5-0	1		925				X	X	X	X					
12	GB-5-2	1		930				X	X	X	X					
13	GB-6-0	1		935				X	X	X	X					
14	GB-6-2	1		940				X	X	X	X					

Total No. of Samples: 14 Method of Shipment: Courier Preservative: 1 = Ice 2 = HCl 3 = HNO_3 4 = H_2SO_4 5 = NaOH 6 = Other

Relinquished By:	Date/Time:	Received By:	Date/Time:
Relinquished By:	Date/Time:	Received By:	Date/Time:
Relinquished By: Saad A. Ebrahim	Date/Time: 16:50 11/27/19	Received For Lab By: OCAC	Date/Time: 11-27-19 1650

Sample Matrix:
GW - Groundwater
WW - Wastewater
SW - Stormwater
DW - Drinking Water
W - Water
SS - Soil/Solid
OT - Other

Sample Integrity: Intact: ✓ On Ice: (Yes) / No @ 4.2°C

TR#1 4.4-0.2=

By signing above, client acknowledges responsibility for payment of all services requested on this chain of custody form and any additional services provided in support of this project. Payment is due within 30 days of invoice date unless otherwise agreed upon, in writing, with Orange Coast Analytical, Inc. All samples remain the property of the client. A disposal fee may be imposed if client fails to pickup sample.

Analysis Request and Chain of Custody Record

ORANGE COAST ANALYTICAL, INC. www.ocalab.com
3002 Dow, Suite 532
Tustin, CA 92780
(714) 832-0064 Fax (714) 832-0067

4620 E. Elwood, Suite 4
Phoenix, AZ 85040
(480) 736-0960 Fax (480) 736-0970

Lab Job No: 24756
Page 2 of 3

REQUIRED TURN AROUND TIME: Standard: ____ 72 Hours: ____ 48 Hours: ____ 24 Hours: ____

CUSTOMER INFORMATION		PROJECT INFORMATION	
COMPANY:	GeoTek, Inc.	PROJECT NAME:	Fox Point Farms
SEND REPORT TO:	Chris Livesey	NUMBER:	3611-SD
EMAIL:	clivesey@geotekusa.com	ADDRESS:	1150 Quail Gardens Dr, Encinitas
ADDRESS:	1384 Poinsettia Ave. Suite "A"		
	Vista, CA 92081	P.O. #	
PHONE: 949-338-9233	FAX:	SAMPLED BY:	CDL/SE

ANALYSIS REQUEST / PRESERVATIVE

	SAMPLE ID	NO. OF CONTAINERS	SAMPLE DATE	SAMPLE TIME	SAMPLE MATRIX	CONTAINER TYPE	TPH	VOCs	CAM17	PCBs							REMARKS/PRECAUTIONS
15	GB-7-0	1	11-27-19	945	SS	8oz	X	X	X	X							
16	GB-7-2	1		950			X	X	X	X							
17	GB-8-0	1		955			X	X	X	X							
18	GB-8-1	1		1000			X	X	X	X							
19	GB-9-0	1		1100			X	X	X	X							
20	GB-9-2	1		1105			X	X	X	X							
21	GB-10-0	1	1110	1110			X	X	X	X							
22	GB-10-2	1		1120			X	X	X	X							
23	GB-11-0	1		1130			X	X	X	X							
24	GB-11-2	1		1140			X	X	X	X							
25	GB-12-0	1		1200			X	X	X	X							
26	GB-12-2	1		1210			X	X	X	X							
27	GB-13-0	1		1230			X	X	X	X							
28	GB-13-1	1		1240			X	X	X	X							

Total No. of Samples: 14 Method of Shipment: Courier

Preservative: 1 = Ice 2 = HCl 3 = HNO_3 4 = H_2SO_4 5 = NaOH 6 = Other

Relinquished By:	Date/Time:	Received By:	Date/Time:
Relinquished By:	Date/Time:	Received By:	Date/Time:
Relinquished By: Saeid Ebrahimi	Date/Time: 11/27/19 1650	Received For Lab By: OCAC	Date/Time: 11-27-19 1650

Sample Matrix:
GW - Groundwater
WW - Wastewater
SW - Stormwater
DW - Drinking Water
W - Water
SS - Soil/Solid
OT - Other IR#1

Sample Integrity:
Intact: ✓ On Ice: Yes / No @ 4.2°C 4.4-0.2=

By signing above, client acknowledges responsibility for payment of all services requested on this chain of custody form and any additional services provided in support of this project. Payment is due within 30 days of invoice date unless otherwise agreed upon, in writing, with Orange Coast Analytical, Inc. All samples remain the property of the client. A disposal fee may be imposed if client fails to pickup sample.

Analysis Request and Chain of Custody Record

Lab Job No: 24756
Page 1 of 1

ORANGE COAST ANALYTICAL, INC. www.ocalab.com
3002 Dow, Suite 532
Tustin, CA 92780
(714) 832-0064 Fax (714) 832-0067

4620 E. Elwood, Suite 4
Phoenix, AZ 85040
(480) 736-0960 Fax (480) 736-0970

REQUIRED TURN AROUND TIME: Standard: ____ 72 Hours: ____ 48 Hours: ____ 24 Hours: ____

CUSTOMER INFORMATION		PROJECT INFORMATION	
COMPANY:	GeoTek, Inc.	PROJECT NAME:	Fox Point Farms
SEND REPORT TO:	Chris Livesey	NUMBER:	3611-SD
EMAIL:	clivesey@geotekusa.com	ADDRESS:	1150 Quail Gardens Dr, Encinitas
ADDRESS:	1384 Poinsettia Ave. Suite "A"		
	Vista, CA 92081	P.O. #	
PHONE: 949-338-9233	FAX:	SAMPLED BY:	CDL/SE

	SAMPLE ID	NO. OF CONTAINERS	SAMPLE DATE	SAMPLE TIME	SAMPLE MATRIX	CONTAINER TYPE	TPH	VOCs	CAM 17	Organochlorine Pesticides							REMARKS/PRECAUTIONS
29	GB-14-0	1	11/27/19	1250	SS	8oz	X	X	X	X							
30	GB-14-2	1	↓	13:00	↓	↓	X	X	X	X							

Total No. of Samples: 2 Method of Shipment: Courier Preservative: 1 = Ice 2 = HCl 3 = HNO_3 4 = H_2SO_4 5 = NaOH 6 = Other

Relinquished By:	Date/Time:	Received By:	Date/Time:
Relinquished By:	Date/Time:	Received By:	Date/Time:
Relinquished By: Sapid Ebrahim	Date/Time: 11/27/19 16:50	Received For Lab By: OCAEA	Date/Time: 11-27-19 1650

Sample Matrix:
GW - Groundwater
WW - Wastewater
SW - Stormwater
DW - Drinking Water
W - Water
SS - Soil/Solid
OT - Other IR#1

Sample Integrity: Intact: ✓ On Ice: Yes / No @ 4.2°C 4.4-0.2=

By signing above, client acknowledges responsibility for payment of all services requested on this chain of custody form and any additional services provided in support of this project. Payment is due within 30 days of invoice date unless otherwise agreed upon, in writing, with Orange Coast Analytical, Inc. All samples remain the property of the client. A disposal fee may be imposed if client fails to pickup sample.

Sample Receipt Report

Laboratory Reference GTK 24756 Logged in by CT

Received:	11/27/19 16:50	Company Name:	GeoTek, Inc.
Method of Shipment:	Hand Delivered	Project Manager:	Mr. Chris Livesey
Shipping Container:	Cooler	Project Name:	Fox Point Farms
# Shipping Containers:	1	Project #:	3611-SD

Sample Quantity
30 Soil

Chain of Custody	Complete ☑	Incomplete ☐	None ☐
Samples On Ice	Yes, Wet ☑	Yes, Blue ☐	No ☐
Observed Temp. (°C): 4.4	Thermometer ID: IR#1	Adjusted Temp.:	4.4+(-0.2)=4.2
Shipping Intact	Yes ☑	N/A ☐	No ☐
Shipping Custody Seals Intact	Yes ☐	N/A ☑	No ☐
Samples Intact	Yes ☑		No ☐
Sample Custody Seals Intact	Yes ☐	N/A ☑	No ☐
Custody Seals Signed & Dated	Yes ☐	N/A ☑	No ☐
Proper Test Containers	Yes ☑		No ☐
Proper Test Preservations	Yes ☑		No ☐
Samples Within Hold Times	Yes ☑		No ☐
VOAs Have Zero Headspace	Yes ☐	N/A ☑	No ☐
Sample Labels	Complete ☑	Incomplete ☐	None ☐
Sample Information Matches COC	Yes ☑	N/A ☐	No ☐

Notes

Client Notified _____ By _____ On _____

APPENDIX C

PROJECT TEAM QUALIFICATIONS

J. MICHAEL BATTEN, CAC, CEM, REPA

Principal/Environmental Services Manager

Education

BS in Geology, California State University, Fresno 1988

Registrations

- Certified Asbestos Consultant (CA #95-1721)
- Licensed Asbestos Abatement Consultant (NV #IJPM0655)
- Certified Environmental Manager (NV #1782)
- Asbestos Professional Inspector (IL #100-11092)
- Registered Environmental Property Assessor (#113162))
- Certified Lead Inspector Assessor (CA #4358)
- Certified Lead Inspector (EPA #LBP-I-1162326-1)
- Certified Lead Risk Assessor (EPA #LBP-R-1162326-1)

Certifications

- AHERA Certified Asbestos Building Inspector, Management Planner, Project Designer, & Contractor/Supervisor
- EPA Accredited Lead-based Paint Inspector & Risk Assessor
- OSHA HAZWOPER certified worker & supervisor
- OSHA Construction Safety & Health (10-Hour)

Affiliations

- American Society of Testing and Materials
- National Registry of Environmental Professionals

Professional Experience

Mr. Batten has over 30 years of environmental experience, throughout which he has conducted and managed numerous environmental investigations, assessments, and remediations. He has prepared several NEPA assessments, USEPA EIS, and CEQA EIR reports. In addition, Mr. Batten has extensive experience in conducting asbestos and lead-based paint surveys and preparing management plans, including remediation design, for asbestos and lead present in buildings.

Project Experience

- **Phase I Environmental Site Assessments:** Mr. Batten has conducted more than 2,000 Phase I Environmental Site Assessments in 27 states, including Brownfield studies under USEPA grants.
- **Phase II Environmental Site Assessments:** Mr. Batten has conducted more than 150 Phase II Environmental Assessments, including Brownfield studies under USEPA grants.
- **Site Characterizations and Remediations:** Mr. Batten has experience conducting numerous site characterizations and remediations, including obtaining regulatory closure.
- **NEPA Studies:** Mr. Batten has conducted more than 200 NEPA studies, including Environmental Assessments, Environmental Impact Reports/Environmental Impact Studies, in eight states. The agencies involved include USEPA, FCC, BLM, National Park Service, and California EPA.
- **Asbestos Services:** Mr. Batten has conducted over 600 asbestos surveys in several states. He has also prepared numerous Asbestos Management Plans, prepared design plans, and monitored numerous abatement projects.
- **Lead-Based Paint Services:** Mr. Batten has conducted numerous Lead-Based Paint surveys.
- **Landfills**: Mr. Batten has conducted investigations and overseen remediations on landfills in Fresno, California and Henderson, Nevada.
- **Other Services:** Mr. Batten has been called upon to conduct less usual services on occasion, including mold consultation and investigation, radon studies, vapor intrusion studies, and indoor air quality studies.

GEOTEK

Professional History

Environmental Services Manager. GeoTek, Inc., 2001 to present.

Director of Environmental Services. ATC Associates, Inc., 1999 to 2001.

Director of Operations. Hygienetics Environmental Services, Inc., 1997 to 1999.

Project Manager. AllWest Environmental, Inc., 1996 to 1997.

Project Manager. Citadel Environmental Services, Inc., 2/1996 to 9/1996.

Project Manager. Boelter Environmental consultants, 3/1995 to 9/1995.

Senior Staff Geologist. Converse Consultants, 1992 to 1995.

Staff Geologist. Converse Environmental West, 1991 to 1992.

Project Geologist. Krazan and Associates, 1990 to 1991.

Environmental Technician. Krazan and Associates, 1989 to 1990.

National Registry of Environmental Professionals

For

Environmental Certifications

This is to Certify that

Michael J Batten

having sucessfully demonstrated to the Academic Board of this organization the required level of knowledge and ability, is here by awarded the distinction of

Registered Environmental Property Assessor

together with all rights, benefits and privileges attached thereto and that the name and title of the aforementioned registrant is today placed upon the register of the organization.

Given under our hands on this 15 day of June, 2013.

Richard A Young

Executive Director

113162

Registrant Number

This Certificate is the property of the National Registry of Environmental Professionals and must, upon demand, be returned.

United States Environmental Protection Agency

This is to certify that

J M Batten

has fulfilled the requirements of the Toxic Substances Control Act (TSCA) Section 402, and has received certification to conduct lead-based paint activities pursuant to 40 CFR Part 745.226 as:

Inspector

In the Jurisdiction of:

All EPA Administered Lead-based Paint Activities Program States, Tribes and Territories

This certification is valid from the date of issuance and expires March 14, 2022

LBP-I-I162326-2

Certification #

December 08, 2018

Issued On

Adrienne Priselac, Manager, Toxics Office

Land Division

United States Environmental Protection Agency

This is to certify that

J M Batten

has fulfilled the requirements of the Toxic Substances Control Act (TSCA) Section 402, and has received certification to conduct lead-based paint activities pursuant to 40 CFR Part 745.226 as:

Risk Assessor

In the Jurisdiction of:

All EPA Administered Lead-based Paint Activities Program States, Tribes and Territories

This certification is valid from the date of issuance and expires March 14, 2022

LBP-R-I162326-2

Certification #

December 08, 2018

Issued On

Adrienne Priselac, Manager, Toxics Office

Land Division

STATE OF CALIFORNIA GAVIN NEWSOM, *Governor*

DEPARTMENT OF INDUSTRIAL RELATIONS
Division of Occupational Safety and Health
Asbestos Certification & Training Unit
2424 Arden Way, Suite 495
Sacramento, CA 95825-2417
(916) 574-2993 Office (916) 483-0572 Fax
http://www.dir.ca.gov/dosh/asbestos.html acru@dir.ca.gov

505011721C **109** **115**

August 23, 2019

J. Michael Batten
8240 Edmond Street
Las Vegas NV 89139

Dear Certified Asbestos Consultant or Technician:

Enclosed is your certification card. **To maintain your certification, you must abide by the rules printed on the back of the certification card.**

Your certification is valid for a period of one year. If you wish to renew your certification, you must apply for renewal at least 60 days before the expiration date shown on your card. [8 CCR 341.15(h)(1)].

Please hold and do not send copies of your required AHERA refresher renewal certificates to our office until you apply for renewal of your certification.

Certificates must be kept current if you are actively working as a CAC or CSST. The grace period is only for those who are not actively working as an asbestos consultant or site surveillance technician.

Please contact our office at the above address or email with any changes in your contact/mailing information within 15 days of the change.

Sincerely,

Jeff Ferrell
Senior Safety Engineer

Attachment: Certification Card

cc: File

Renewal – Card Attached (Revised 01/10/2019)

California Department of PublicHealth

STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC HEALTH

LEAD-RELATED CONSTRUCTION CERTIFICATE

INDIVIDUAL:	CERTIFICATE TYPE:	NUMBER:	EXPIRATION DATE:
Michael Batten	Lead Inspector/Assessor	LRC-00002629	11/17/2020

Disclaimer: This document alone should not be relied upon to confirm certification status. Compare the individual's photo and name to another valid form of government issued photo identification. Verify the individual's certification status by searching for Lead-Related Construction Professionals at www.cdph.ca.gov/programs/clppb or calling (800) 597-LEAD.

IDPH
ILLINOIS DEPARTMENT OF PUBLIC HEALTH

525-535 West Jefferson Street • Springfield, Illinois 62761-0001 • www.dph.illinois.gov

MICHAEL BATTEN
8240 EDMOND STREET
LAS VEGAS, NV 89139

4/5/2018

ASBESTOS PROFESSIONAL LICENSE ID NUMBER: 11092

Enclosed is your Asbestos Professional License. Please note the expiration date on the card and in the image depicted below.

COPY OF THE ASBESTOS PROFESSIONAL LICENSE

Front of License

ILLINOIS DEPARTMENT OF PUBLIC HEALTH
IDPH
PROTECTING HEALTH, IMPROVING LIVES

ASBESTOS PROFESSIONAL LICENSE

ID NUMBER	ISSUED	EXPIRES
100 - 11092	**4/5/2018**	05/15/2019

MICHAEL BATTEN
8240 EDMOND STREET
LAS VEGAS, NV 89139
Environmental Health

Back of License

ENDORSEMENTS	TC EXPIRES
INSPECTOR	3/20/2019

Alteration of this license shall result in legal action
This license issued under authority of the State of Illinois Department of Public Health
This license is valid only when accompanied by a valid training course certificate.

If you have any questions or need further assistance, contact the Asbestos Program at (217)782-3517 or fax (217)785-5897.

Our WEB address is: dph.illinois.gov/topics-services/environmental-health-protection/asbestos
EMAIL Address: dph.asbestos@illinois.gov

State of Nevada

Department of Conservation and Natural Resources

Division of Environmental Protection

This is to certify that

Michael J Batten

having given satisfactory evidence of the necessary qualifications as required by the Nevada Revised Statute 459.400 to 459.600, inclusive, and Nevada Administrative Code 459.970 to 459.9729, inclusive, has been granted certification as a

Environmental Manager

in the State of Nevada

In testimony whereof, witness the signature of the Administrator and the Seal of the State of Nevada.

1782

Certification Number

Greg Lovato, Administrator

8/31/2021

Expiration Date

State of Nevada Department of Business & Industry

Industrial Relations (DIR)

STATE OF NEVADA
DEPARTMENT OF BUSINESS AND INDUSTRY
DIVISION OF INDUSTRIAL RELATIONS
Occupational Safety and Health Administration
Asbestos Control Program

Certifies That J. Michael Batten
Geotek Insite Inc.
is Licensed As Asbestos Abatement Consultant

License No. IJPM-655 Expiration Date 03/07/2020

Signature Of Licensee J. Michael Batten

M & C Environmental Training

Asbestos Inspector
Refresher Training Course

Michael Batten

Has successfully completed the Asbestos Inspector Refresher course approved by the California Division of Occupational Safety and Health for purposes of certification required by Title 8, Article 2.7, Chapter 3.2, Section 341.16 and the accreditation required under the Toxic Substances Control Act, Title II. Conducted by M&C Environmental Training Inc., 1619 Beverly Place, Berkeley, California. Tel. # (510) 525 – 1388

Course Approval Number: CA-003-06

Location: Oakland, California	Expiration: March 7, 2020
Dates: March 7, 2019	
Director of Training: John McGinnis	

Certificate Number 45383 IR

M & C Environmental Training

Asbestos Management Planner
Refresher Training Course

Michael Batten

Has successfully completed the Asbestos Management Planner Refresher course approved by the California Division of Occupational Safety and Health for purposes of certification required by Title 8, Article 2.7, Chapter 3.2, Section 341.16 and the accreditation required under the Toxic Substances Control Act, Title II. Conducted by M&C Environmental Training Inc., 1619 Beverly Place, Berkeley, California. Tel. # (510) 525 – 1388

Course Approval Number: CA-003-08

Location: Oakland, California	Expiration: March 7, 2020
Dates: March 7, 2019	
Director of Training: John McGinnis	

Certificate Number 45396 PR

M & C Environmental Training

Asbestos Contractor/Supervisor
Refresher Training Course

J. Michael Batten

Has successfully completed the Asbestos Contractor/Supervisor Refresher course approved by the California Division of Occupational Safety and Health for purposes of certification required by Title 8, Article 2.7, Chapter 3.2, Section 341.16 and the accreditation required under the Toxic Substances Control Act, Title II. Conducted by M&C Environmental Training Inc., 1619 Beverly Place, Berkeley, California. Tel. # (510) 525 – 1388

Course Approval Number: CA-003-04

Location: Oakland, California	Expiration: September 13, 2020
Dates: September 13, 2019	
Director of Training: John McGinnis	

Certificate Number 46376 SR

M & C Environmental Training

Asbestos Project Designer
Refresher Training Course

J. Michael Batten

Has successfully completed the Asbestos Project Designer Refresher course approved by the California Division of Occupational Safety and Health for purposes of certification required by Title 8, Article 2.7, Chapter 3.2, Section 341.16 and the accreditation required under the Toxic Substances Control Act, Title II. Conducted by M&C Environmental Training Inc., 1619 Beverly Place, Berkeley, California. Tel. # (510) 525 – 1388

Course Approval Number: CA-003-10

Location: Oakland, California	Expiration: September 11, 2020
Dates: September 11, 2019	
Director of Training: John McGinnis	

Certificate Number 46347 DR

This is to Certify that
Michael Batten
Has Satisfactorily Completed Training in Accordance with Applicable Rules and Regulations
Asbestos Building Inspector Refresher
Completed: 3/19/2019 *Expires: 3/19/2020*
Certificate: BIR1903190998
2019
Occupational Training & Supply, Inc.
7233 Adams Street ♦ Willowbrook, IL 60527 ♦ (630) 655-3900

OSHA 002340551

U.S. Department of Labor
Occupational Safety and Health Administration

Michael Batten

has successfully completed a 10-hour Occupational Safety and Health Training Course in

Construction Safety & Health

Kenner Costen 12/12/09
(Trainer) (Date)

Christopher D. Livesey, PG

Project Geologist

Areas of Expertise

Geotechnical Field Investigations,
Fault Hazard Studies, Downtown San Diego Infill Development,
Grading and Earthwork Construction,
Design Build Construction,
Industry Standard of Care,
Hillside, Liquefaction, Seismic Hazard,
Landslide Repair. Phase I & II tasks

Education

Bachelor of Science in Geology, Cal State University, Long Beach

Registrations

Registered Geologist, GEO 9584

Certifications

OSHA 40-Hr HAZWOPER Training
OSHA 8-Hour Refresher
ACI-Field Tech Grade I
First Aid/CPR

Professional Affiliations

San Diego Association of Geologist
-President circa 2018

San Diego Geological Society
-Retired Board Member

Professional Experience

Mr. Livesey has been involved with numerous residential, commercial, and public works, projects within the southern California area. From single lot custom homes to master-planned communities to urban high-rise infill development. Many private and public works projects have been successfully completed across southern and central California. Mr. Livesey has gained experience from proposing services, to the laboratory, to site geotechnical and fault hazard evaluations, to construction observation and testing, to project management, which provides a long case history throughout development of a project. Projects include fault evaluations, various commercial and residential site developments, These projects have generally included preliminary geotechnical investigations, slope stability evaluations, review and design recommendations, street improvements construction and testing services, design build construction projects, landslide repair and project management.

Representative Project Experience

Project experience has included residential and commercial developments, for various land developers including City Ventures, Streetlights Residential, DR Horton, Chelsea Investments, Holland Partners Group, Level 3 Construction, Kettler Leweck Engineering, Integral Communities, HNTB, etc. Mr. Livesey has also completed geotechnical investigations and performed project management for numerous residential tracts and commercial facilities all across Southern California.

Professional History

Project Geologist - GeoTek, Inc., Vista, 2018 to present

Project Geologist - Leighton Consulting, Inc., San Diego, 2013 to 2018

Geologist - Leighton Consulting, Inc., Irvine, 2004 to 2013

Engineering Technician - GeoSoils, Inc., Santa Ana, 2002 to 2004